


Displacement Correction  
Correction Factor: ISO 1585  
NOTE: Load Cell Included.

TEST NAME MEGA PRO T007    MAX POWER. 11.7 (11.7) / 8001    MAX TORQUE 12.13 (12.13) / 3119    Temp. °C 30.6 °C    Humidity % 59 %    Pressure 1000.0 mbar    KMH 83.0    Date/Time 10/10/2017 9:41:42

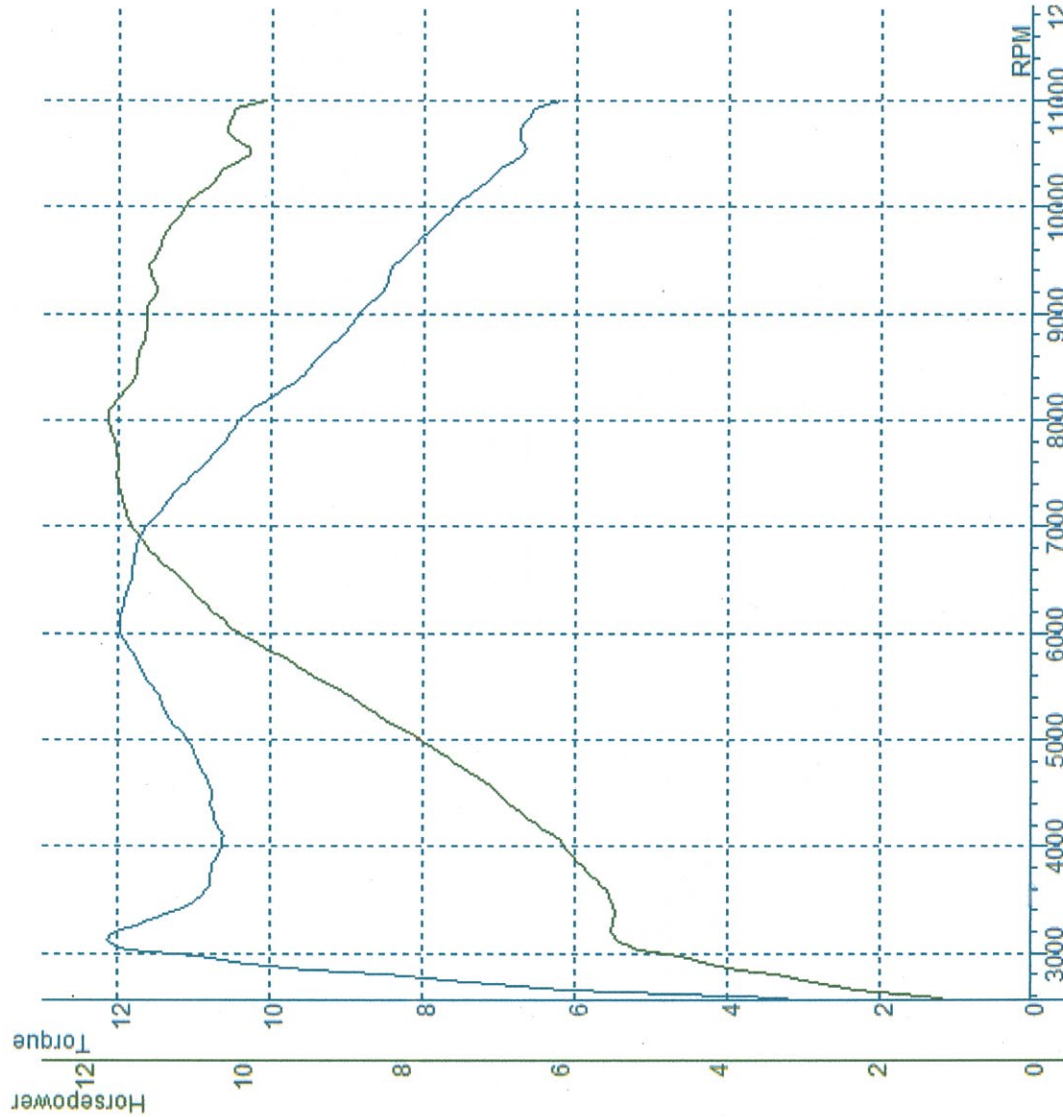

DATA FOR TEST: MEGA PRO T007


Comments  
STANDART

RPM	HP (HP/Q)	(N*M*M)	T
2500	1.7	4.68	0.52
2750	3.2	8.49	0.58
3000	5.0	11.86	0.68
3119	5.2	12.13	0.72
3250	5.3	11.76	0.78
3500	5.3	10.90	0.90
3750	5.6	10.77	1.00
4000	6.0	10.61	1.12
4250	6.4	10.72	1.22
4500	6.7	10.76	1.32
4750	7.3	10.95	1.44
5000	7.8	11.12	1.54
5250	8.4	11.38	1.64
5500	9.0	11.60	1.74
5750	9.4	11.74	1.82
6000	10.0	11.97	1.92
6250	10.4	11.92	2.02
6500	10.8	11.81	2.12
6750	11.1	11.77	2.22
7000	11.4	11.61	2.32
7250	11.5	11.28	2.44
7500	11.6	10.91	2.56
7750	11.6	10.61	2.66
8000	11.7	10.41	2.76
8001	11.7	10.41	2.76
8250	11.5	9.87	2.90
8500	11.3	9.43	3.04
8750	11.2	9.09	3.16
9000	11.2	8.81	3.30
9250	11.1	8.48	3.44
9500	11.1	8.28	3.58
9750	10.9	7.92	3.74
10000	10.7	7.59	3.88
10250	10.3	7.12	4.06
10500	9.9	6.69	4.22
10750	10.2	6.69	4.42
... (more)			

LOSSES: 0.0 HP    0.0N\*M\*M  
TOTAL ENGINE: 11.7HP    12.13N\*M\*M

Displacement Correction  
Correction Factor: ISO 1585  
NOTE: Load Cell Included.

TEST NAME	MAX POWER.	MAX TORQUE	Temp. °C	Humidity %	Pressure	KMH	Date/Time
MEGA PRO T005	11.9 (11.9) / 7902	12.46 (12.46) / 3540	30.2 °C	58 %	1000.0 mbar	83.0	10/10/2017 9:38:08

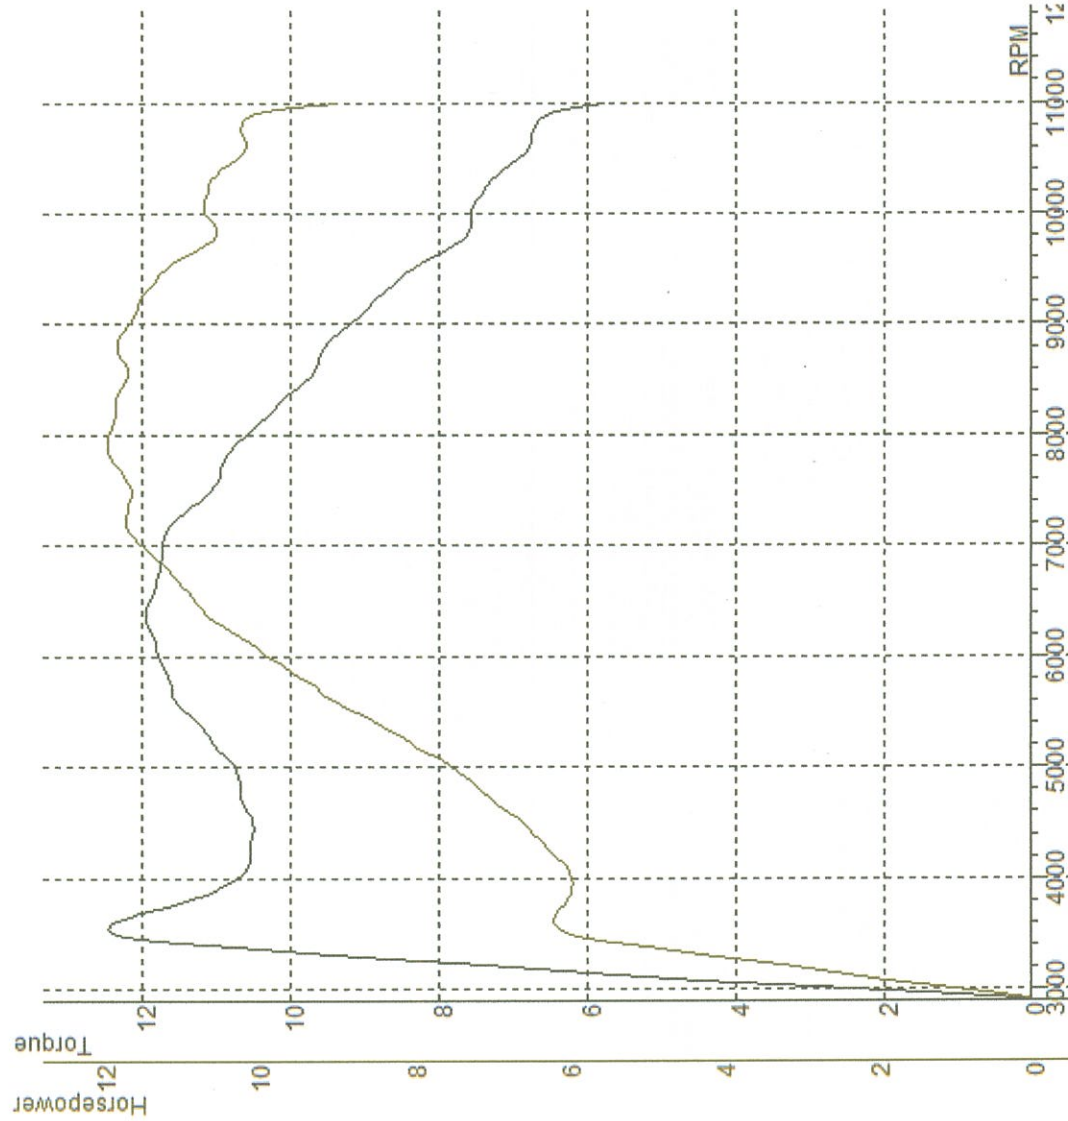


DATA FOR TEST: MEGA PRO T005

Comments	RPM	HP (HP/Q) (N*M*M)	T
STANDART	3000	1.2	2.94
	3250	3.9	8.64
	3500	6.1	12.46
	3540	6.1	12.46
	3750	6.0	11.55
	4000	6.0	10.63
	4250	6.2	10.54
	4500	6.6	10.50
	4750	7.1	10.68
	5000	7.5	10.77
	5250	8.1	11.08
	5500	8.8	11.44
	5750	9.4	11.62
	6000	9.9	11.78
	6250	10.5	11.91
	6500	10.8	11.87
	6750	11.2	11.76
	7000	11.5	11.71
	7250	11.7	11.50
	7500	11.7	11.02
	7750	11.9	10.89
	7902	11.9	10.76
	8000	11.9	10.56
	8250	11.8	10.16
	8500	11.7	9.74
	8750	11.8	9.57
	9000	11.6	9.15
	9250	11.5	8.76
	9500	11.2	8.32
	9750	10.6	7.67
	10000	10.7	7.56
	10250	10.6	7.32
	10500	10.2	6.91
	10750	10.2	6.73
	11000	8.0	5.11
LOSSES:		0.0 HP	0.0 N*M*M
TOTAL ENGINE:		11.9 HP	12.46 N*M*M

Displacement Correction  
 Correction Factor: ISO 1585  
 NOTE: Load Cell Included.

TEST NAME MEGA PRO T003    MAX POWER. 12.2 (12.5) / 8643    MAX TORQUE 12.40 (12.95) / 3978    Temp. °C 30.2 °C    Humidity % 58 %    Pressure 1000.0 mbar    KMH 83.0    Date/Time 10/10/2017 9:37:40

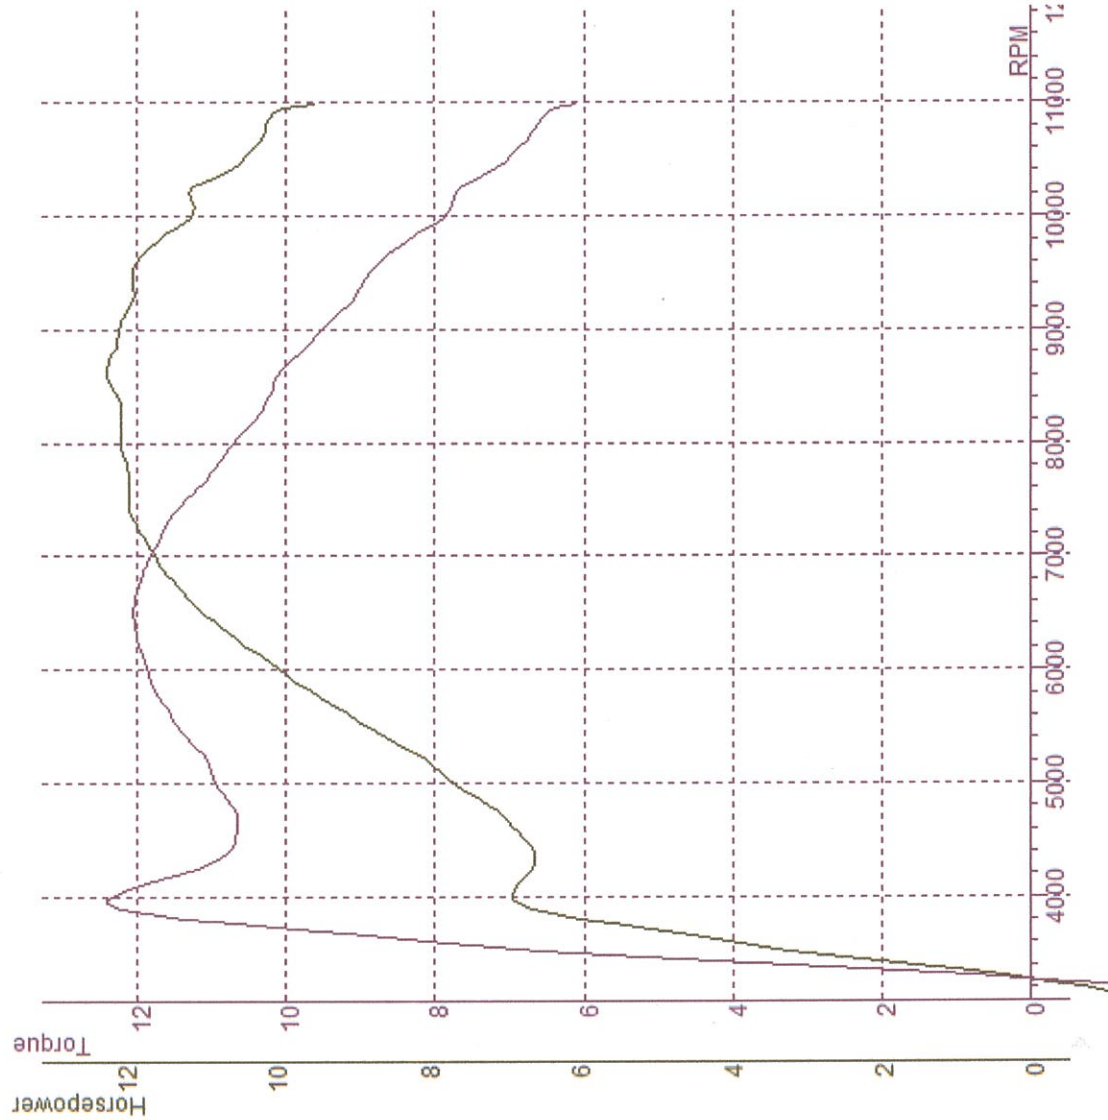

DATA FOR TEST: MEGA PRO T003


Comments  
 STANDART

RPM	HP (HPVQ (N*M*M))	T
3500	3.2	6.57
3750	5.5	10.66
3978	6.8	12.40
4000	6.9	12.29
4250	6.6	11.00
4500	6.7	10.66
4750	7.1	10.67
5000	7.7	10.98
5250	8.1	11.11
5500	8.8	11.45
5750	9.4	11.70
6000	10.0	11.85
6250	10.5	11.99
6500	11.0	12.04
6750	11.3	11.94
7000	11.6	11.78
7250	11.8	11.60
7500	11.9	11.32
7750	11.9	10.93
8000	12.0	10.64
8250	12.0	10.36
8500	12.2	10.15
8643	12.2	10.05
8750	12.1	9.86
9000	12.0	9.46
9250	11.9	9.09
9500	11.9	8.84
9750	11.6	8.41
10000	11.1	7.82
10250	11.1	7.63
10500	10.4	6.98
10750	10.1	6.64
11000	8.6	5.49

LOSSES: -0.2HP    -0.5N\*M\*M  
 TOTAL ENGINE: 12.5HP    12.95N\*M\*M

Displacement Correction  
Correction Factor: ISO 1585  
NOTE: Load Cell Included.

TEST NAME	MAX POWER.	MAX TORQUE	Temp. °C	Humidity %	Pressure	KMH	Date/Time
MEGA PRO T041	9.9 (9.9) / 7411	11.05 (11.05) / 4934	33.5 °C	47 %	1000.0 mbar	89.3	10/10/2017 10:39:25

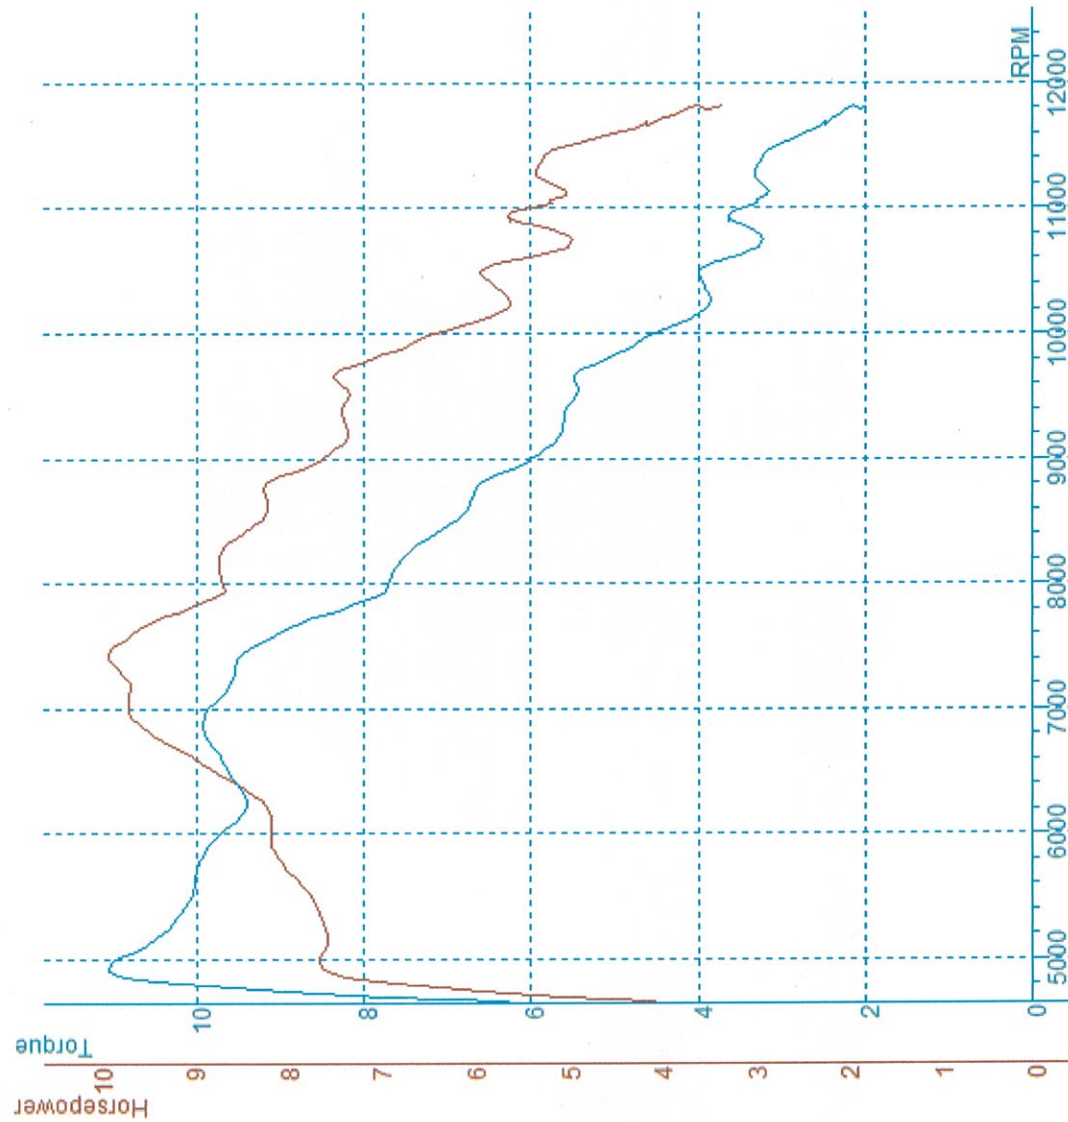

Comments  
COIL STD BUSI RACING CDI RACING TANPA DUAL BAND


DATA FOR TEST: MEGA PRO T041

RPM	HP (HP)*M	T (N*M)*M	T
4500	5.0	7.73	0.52
4750	6.5	9.86	0.56
4934	7.6	11.05	0.64
5000	7.6	10.85	0.68
5250	7.6	10.27	0.80
5500	7.7	10.05	0.90
5750	8.0	9.96	1.02
6000	8.2	9.66	1.16
6250	8.3	9.40	1.28
6500	8.8	9.64	1.40
6750	9.4	9.89	1.52
7000	9.7	9.82	1.64
7250	9.7	9.53	1.76
7411	9.9	9.49	1.84
7500	9.8	9.24	1.90
7750	9.1	8.31	2.06
8000	8.7	7.67	2.22
8250	8.7	7.45	2.36
8500	8.2	6.87	2.54
8750	8.2	6.66	2.72
9000	7.6	5.97	2.92
9250	7.4	5.62	3.14
9500	7.3	5.45	3.34
9750	7.3	5.27	3.58
10000	6.4	4.50	3.88
10250	5.6	3.86	4.18
10500	5.9	3.96	4.50
10750	5.0	3.25	4.90
11000	5.4	3.44	5.24
11250	5.3	3.32	5.62
11500	4.8	2.94	6.08
11750	3.8	2.28	6.60

LOSSES: 0.0 HP  
TOTAL ENGINE: 9.9HP  
0.0N\*M\*M  
11.05N\*M\*M

Displacement Correction  
Correction Factor: ISO 1585  
NOTE: Load Cell Included.

TEST NAME	MAX POWER	MAX TORQUE	Temp. °C	Humidity %	Pressure	KMH	Date/Time
MEGA PRO T040	9.8 (9.8) / 7569	11.64 (11.64) / 5134	33.5 °C	47 %	1000.0 mbar	90.1	10/10/2017 10:39:09

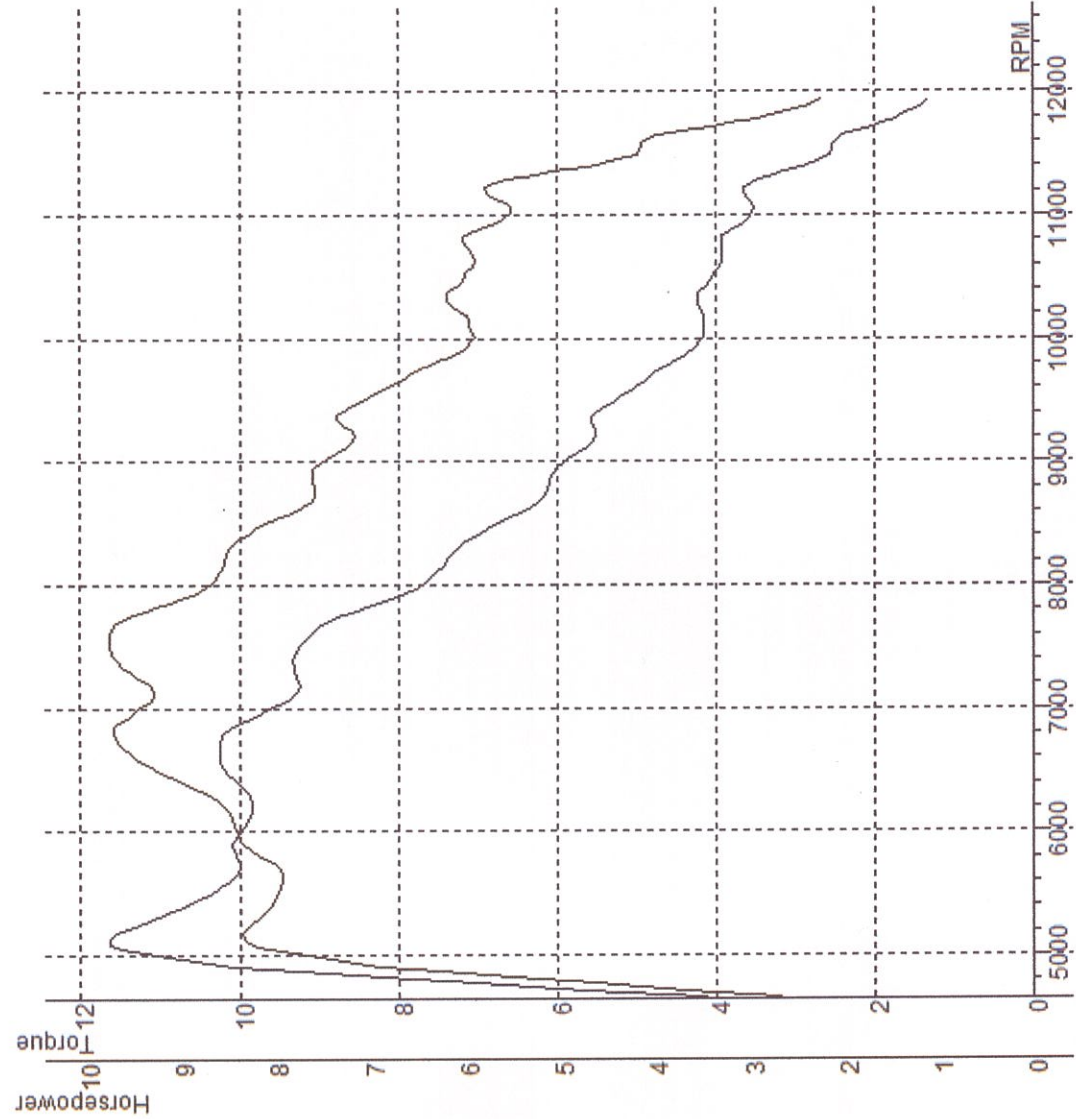


DATA FOR TEST: MEGA PRO T040  
Comments  
COIL STD BUSI RACING CDI RACING TANPA DUAL BAND

RPM	HP (HP/Q)	(N*M*M)	T
4500	3.7	5.64	0.52
4750	4.6	7.00	0.54
5000	7.8	11.19	0.64
5134	8.3	11.64	0.70
5250	8.2	11.21	0.76
5500	7.9	10.23	0.90
5750	8.1	10.01	1.00
6000	8.4	9.97	1.12
6250	8.7	9.86	1.24
6500	9.3	10.20	1.34
6750	9.7	10.22	1.46
7000	9.4	9.49	1.60
7250	9.5	9.27	1.72
7500	9.7	9.25	1.84
7569	9.8	9.16	1.88
7750	9.5	8.67	2.00
8000	8.7	7.68	2.16
8250	8.5	7.32	2.32
8500	8.0	6.68	2.52
8750	7.6	6.13	2.70
9000	7.5	5.86	2.92
9250	7.2	5.51	3.12
9500	7.0	5.22	3.36
9750	6.4	4.66	3.62
10000	5.9	4.16	3.90
10250	6.1	4.22	4.18
10500	6.0	4.04	4.48
10750	6.0	3.94	4.78
11000	5.5	3.54	5.12
11250	5.7	3.56	5.50
11500	4.1	2.54	5.96
11750	3.1	1.83	6.68

LOSSES: 0.0 HP  
TOTAL ENGINE: 9.8HP  
0.0N\*M\*M  
11.64N\*M\*M

Displacement Correction  
Correction Factor: ISO 1585  
NOTE: Load Cell Included.

TEST NAME: MEGA PRO T039    MAX POWER: 11.0 (11.0) / 7480    Temp. °C: 33.5 °C    Humidity %: 47 %    Pressure: 1000.0 mbar    KMH: 89.9    Date/Time: 10/10/2017 10:38:52

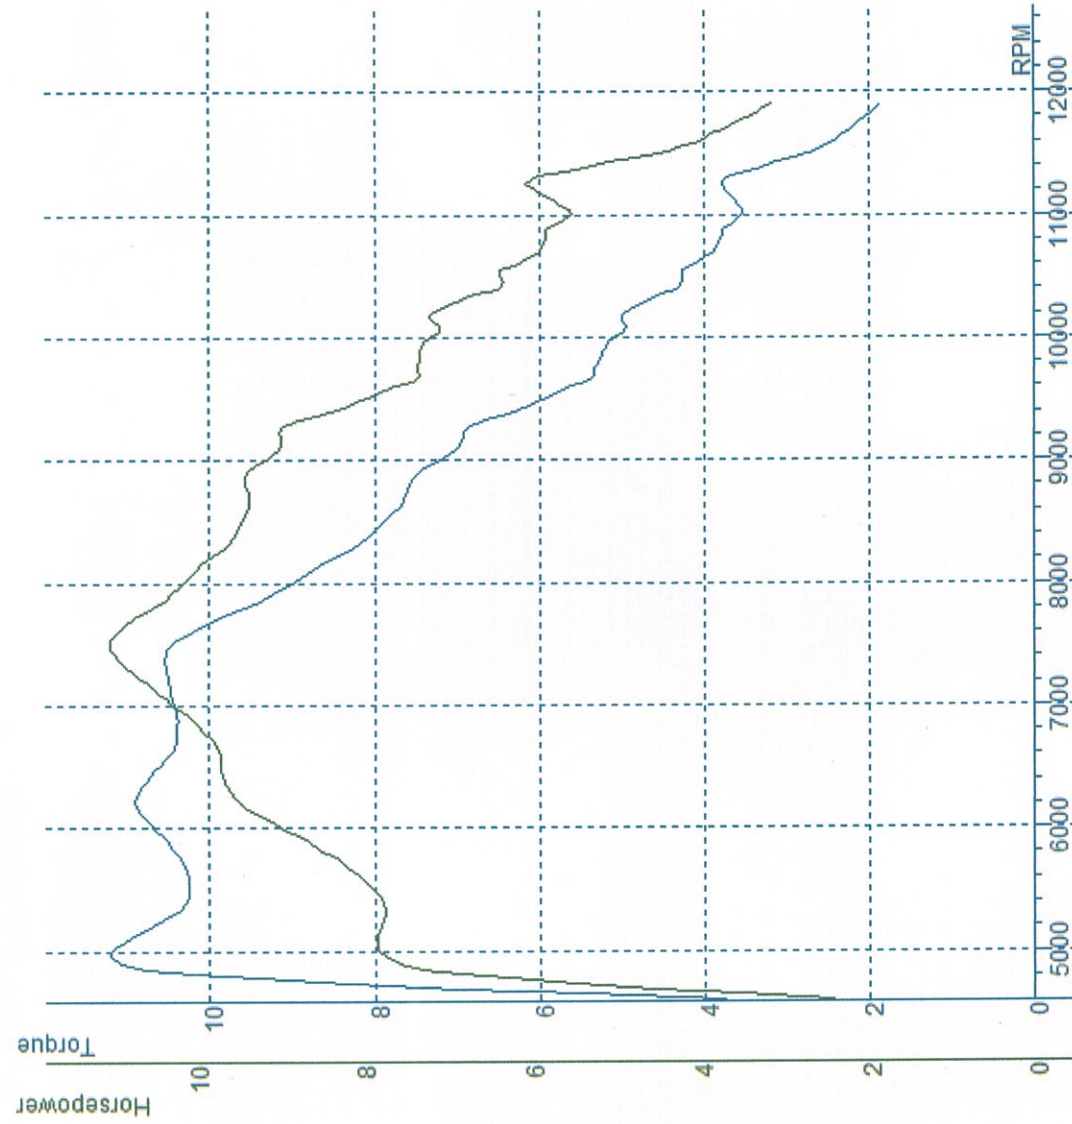

Comments  
COIL STD BUSI RACING CDI RACING TANPA DUAL BAND

DATA FOR TEST: MEGA PRO T039

RPM	HP (HP)*M	T (N*M)*M
4500	3.5	5.43
4750	6.2	9.40
4997	7.8	11.21
5000	7.8	11.15
5250	7.7	10.45
5500	7.9	10.24
5750	8.3	10.34
6000	9.0	10.71
6250	9.6	10.85
6500	9.7	10.60
6750	9.9	10.39
7000	10.2	10.43
7250	10.7	10.52
7480	11.0	10.47
7500	11.0	10.40
7750	10.5	9.58
8000	10.1	8.97
8250	9.6	8.26
8500	9.4	7.87
8750	9.4	7.59
9000	9.1	7.16
9250	9.0	6.84
9500	7.9	5.90
9750	7.3	5.31
10000	7.2	5.07
10250	7.0	4.83
10500	6.4	4.29
10750	5.8	3.84
11000	5.5	3.53
11250	6.0	3.79
11500	4.3	2.67
11750	3.5	2.13

LOSSES: 0.0 HP    0.0N\*M\*M  
TOTAL ENGINE: 11.0HP    11.21N\*M\*M

Displacement Correction  
Correction Factor: ISO 1585  
NOTE: Load Cell Included.

TEST NAME  
MEGA PRO T038

MAX POWER.  
10.3 (10.3) / 7140

MAX TORQUE  
10.92 (10.92) / 5067


Temp. °C  
33.5 °C

Humidity %  
47 %

Pressure  
1000.0 mbar

KMH  
90.5

Date/Time  
10/10/2017 10:38:36

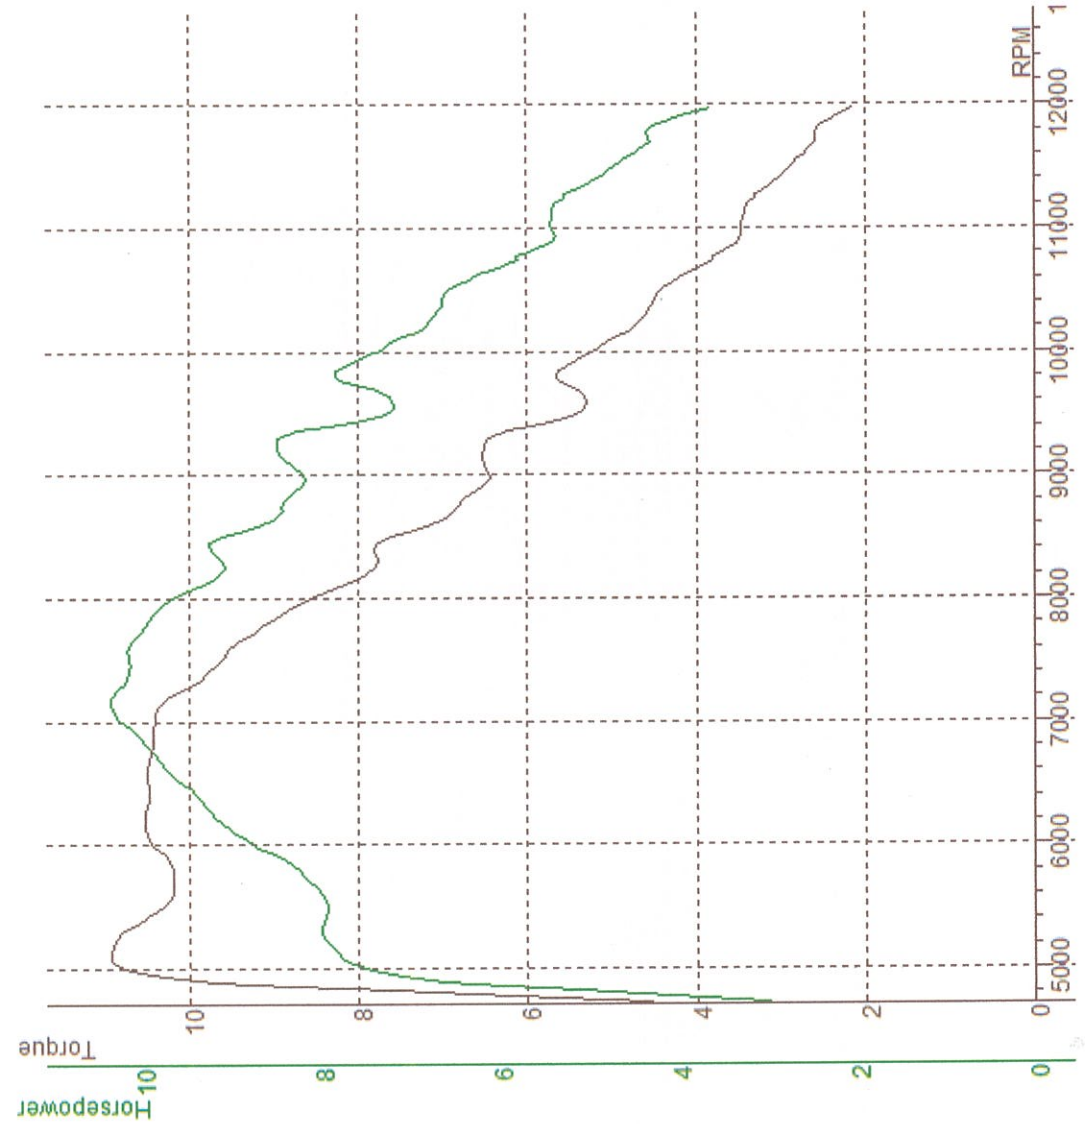

Comments  
COIL STD BUSI RACING CDI RACING TANPA DUAL BAND


DATA FOR TEST: MEGA PRO T038

RPM	HP (HP/Q) (N*M*M)	T
4500	4.1	6.15
4750	5.1	7.58
5000	7.6	10.86
5067	7.7	10.92
5250	8.0	10.80
5500	7.9	10.28
5750	8.2	10.19
6000	8.8	10.45
6250	9.2	10.51
6500	9.6	10.49
6750	9.9	10.43
7000	10.2	10.40
7140	10.3	10.32
7250	10.2	10.05
7500	10.1	9.61
7750	10.0	9.13
8000	9.7	8.58
8250	9.0	7.78
8500	9.1	7.60
8750	8.4	6.82
9000	8.2	6.45
9250	8.5	6.49
9500	7.2	5.36
9750	7.8	5.64
10000	7.3	5.17
10250	6.8	4.67
10500	6.5	4.39
10750	5.8	3.81
11000	5.4	3.48
11250	5.3	3.30
11500	4.7	2.88
11750	4.3	2.60

LOSSES: 0.0 HP  
TOTAL ENGINE: 10.3HP  
0.0N\*M\*M  
10.92N\*M\*M

Displacement Correction  
 Correction Factor: ISO 1585  
 NOTE: Load Cell Included.

TEST NAME: MEGA PRO T037  
 MAX POWER: 10.5 (10.5) / 7674  
 MAX TORQUE: 11.94 (11.94) / 5041  
 Temp. °C: 33.5 °C  
 Humidity %: 47 %  
 Pressure: 1000.0 mbar  
 KMH: 89.3  
 Date/Time: 10/10/2017 10:38:21

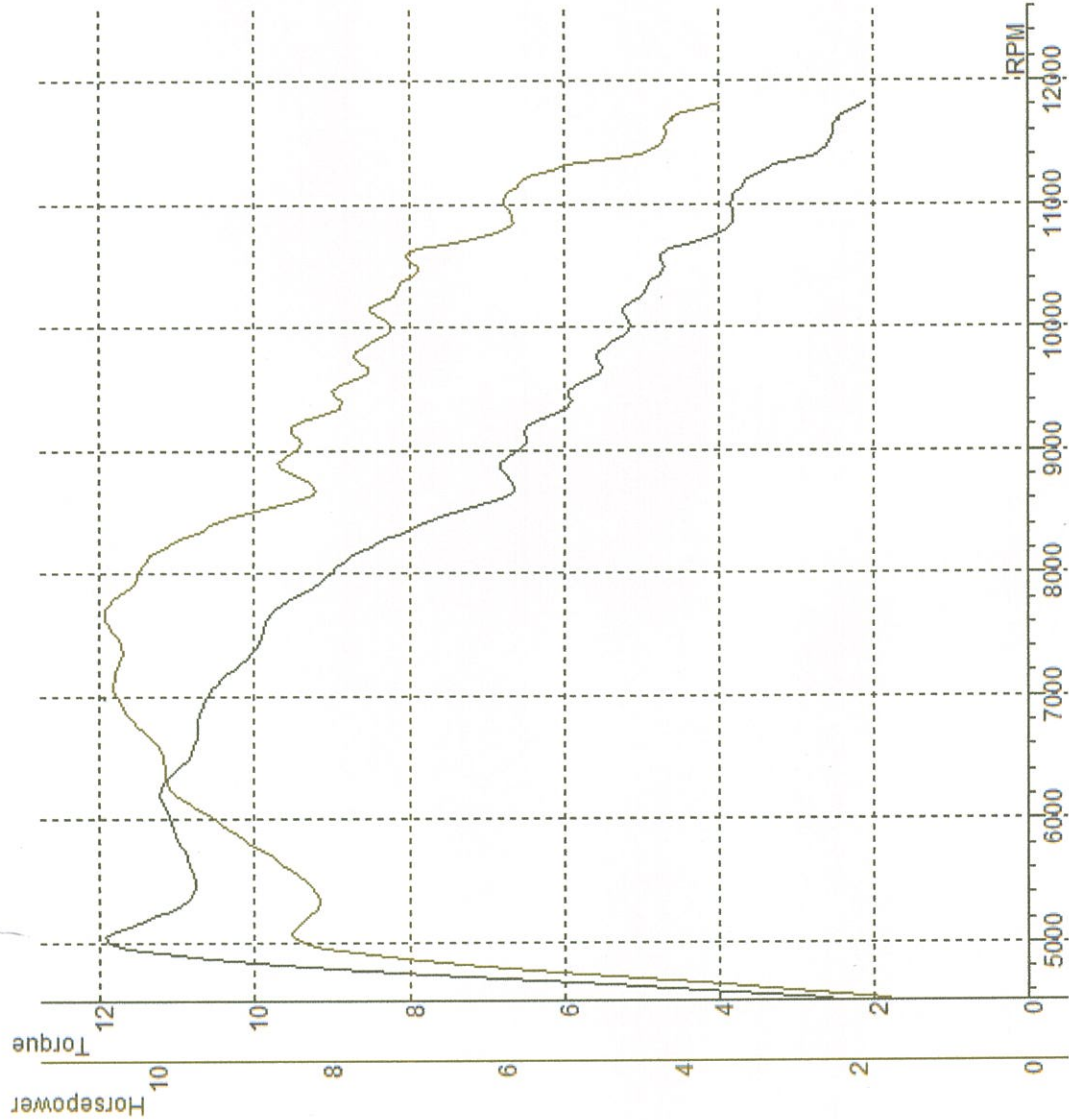

DATA FOR TEST: MEGA PRO T037  
 Comments: COIL STD BUSI RACING CDI RACING TANPA DUAL BAND


RPM	HP (HP)Q (N*M*M)	T
4500	2.7	4.21
4750	5.7	8.57
5000	8.4	11.94
5041	8.4	11.94
5250	8.1	11.08
5500	8.3	10.78
5750	8.8	10.94
6000	9.3	11.10
6250	9.8	11.15
6500	9.9	10.82
6750	10.2	10.74
7000	10.4	10.59
7250	10.4	10.17
7500	10.4	9.89
7674	10.5	9.78
7750	10.4	9.54
8000	10.1	8.94
8250	9.7	8.32
8500	8.7	7.26
8750	8.3	6.71
9000	8.3	6.57
9250	8.1	6.15
9500	7.9	5.84
9750	7.7	5.59
10000	7.3	5.14
10250	7.2	4.96
10500	7.0	4.72
10750	6.1	3.98
11000	6.0	3.84
11250	5.6	3.48
11500	4.1	2.54
11750	3.8	2.30

LOSSES: 0.0 HP  
 TOTAL ENGINE: 10.5HP  
 0.0N\*M\*M  
 11.94N\*M\*M



Displacement Correction  
 Correction Factor: ISO 1585  
 NOTE: Load Cell Included.

TEST NAME	MAX POWER	MAX TORQUE	Temp. °C	Humidity %	Pressure	KMH	Date/Time
MEGA PRO T017	12.1 (12.4) / 7703	12.81 (13.64) / 3363	31.9 °C	52 %	1000.0 mbar	83.1	10/10/2017 10:02:40

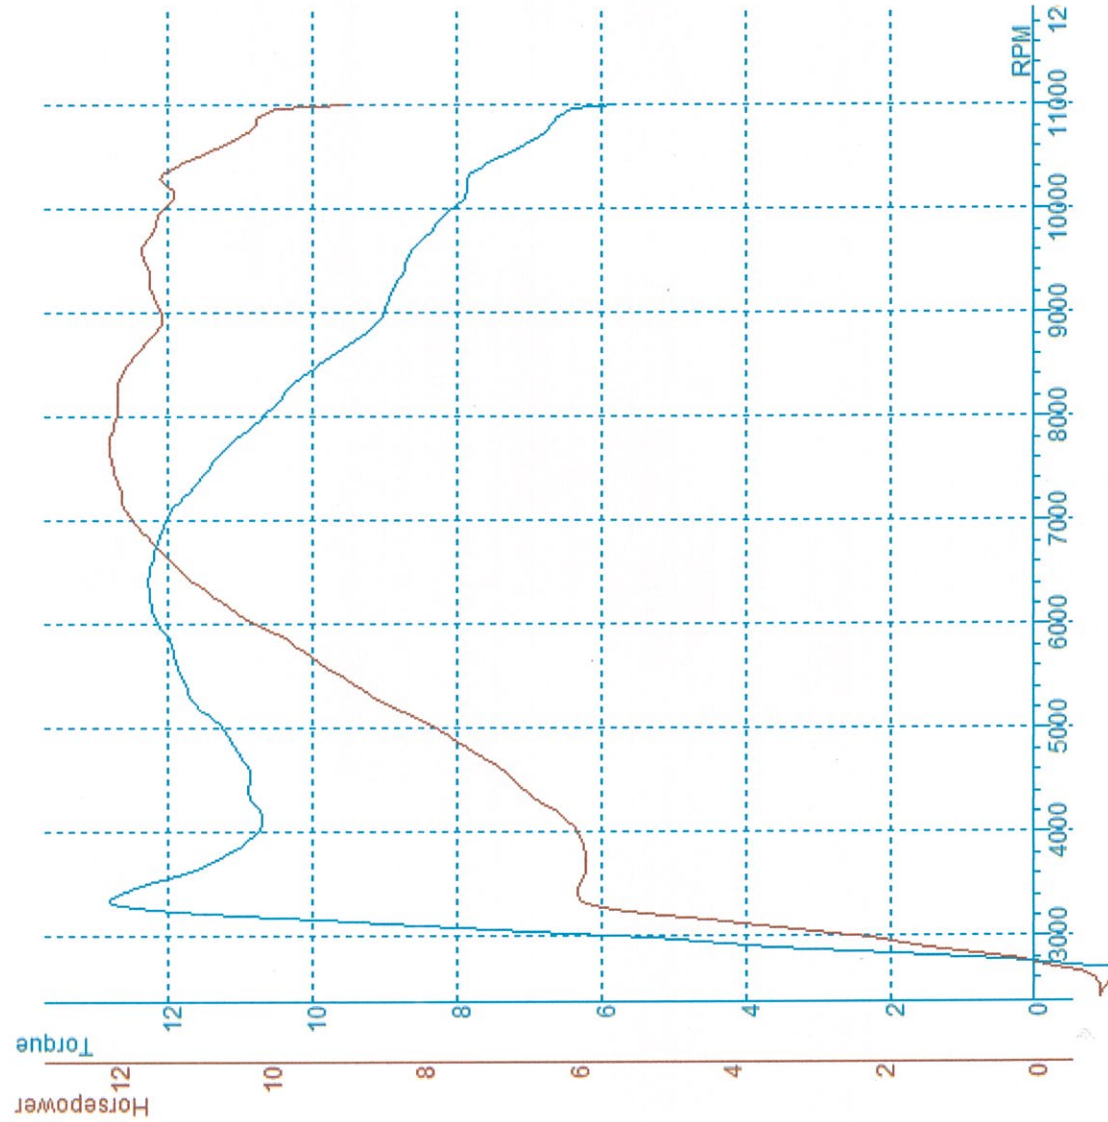

DATA FOR TEST: MEGA PRO T017


Comments  
 COIL RACING BUSI RACING

RPM	HP (HP)Q (N*M*M)	T
3000	2.9	6.95
3250	5.6	12.47
3363	6.0	12.81
3500	5.9	12.20
3750	5.9	11.18
4000	6.0	10.74
4250	6.4	10.77
4500	6.8	10.86
4750	7.3	11.02
5000	7.9	11.28
5250	8.6	11.67
5500	9.1	11.82
5750	9.6	11.92
6000	10.2	12.12
6250	10.7	12.25
6500	11.2	12.24
6750	11.5	12.14
7000	11.8	11.99
7250	11.9	11.70
7500	12.0	11.41
7703	12.1	11.19
7750	12.1	11.05
8000	12.0	10.66
8250	12.0	10.31
8500	11.8	9.90
8750	11.5	9.33
9000	11.4	9.00
9250	11.5	8.86
9500	11.6	8.68
9750	11.5	8.38
10000	11.3	8.00
10250	11.4	7.87
10500	10.9	7.37
10750	10.2	6.74
11000	9.0	5.76

LOSSES: -0.3 HP  
 TOTAL ENGINE: 12.4HP  
 -0.8N\*M\*M  
 13.64N\*M\*M

Displacement Correction  
 Correction Factor: ISO 1585  
 NOTE: Load Cell Included.

TEST NAME	MAX POWER	MAX TORQUE	Temp. °C	Humidity %	Pressure	KMH	Date/Time
MEGA PRO T018	12.1 (12.1)/7901	12.50 (12.50)/4079	31.9 °C	52 %	1000.0 mbar	83.0	10/10/2017 10:02:54

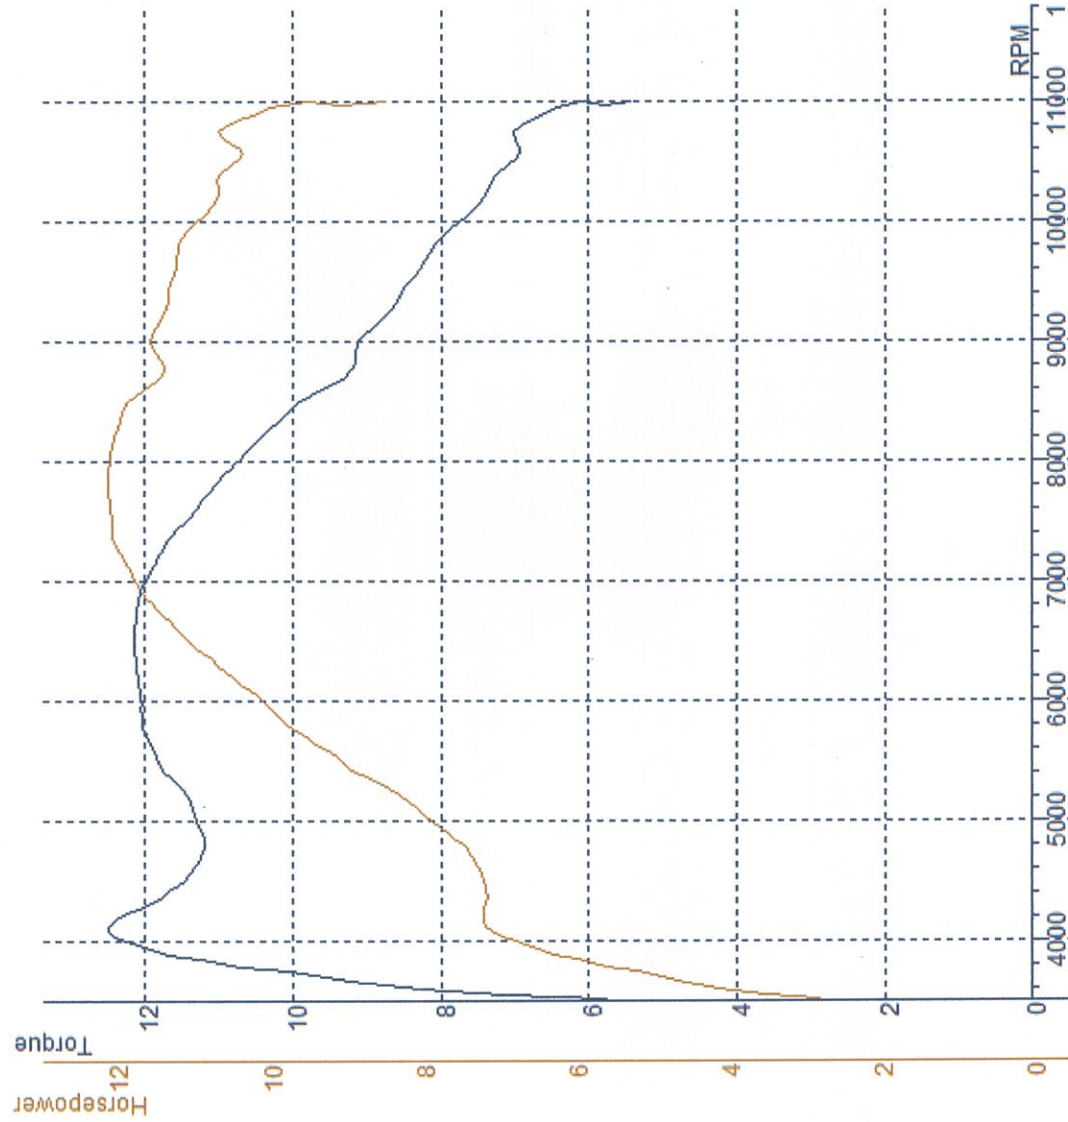

**DATA FOR TEST: MEGA PRO T018**


Comments  
 COIL RACING BUSI RACING

RPM	HP (HP*Q (N*M*M))	T
3250	3.5	7.11
3500	4.1	8.27
3750	5.6	10.69
4000	6.9	12.42
4079	7.1	12.50
4250	7.2	12.10
4500	7.2	11.46
4750	7.4	11.20
5000	7.9	11.29
5250	8.4	11.49
5500	9.1	11.83
5750	9.7	12.02
6000	10.1	12.05
6250	10.6	12.11
6500	11.0	12.14
6750	11.4	12.11
7000	11.8	11.93
7250	12.0	11.73
7500	12.0	11.39
7750	12.1	11.10
7901	12.1	10.91
8000	12.1	10.70
8250	12.0	10.28
8500	11.8	9.86
8750	11.4	9.19
9000	11.5	9.09
9250	11.3	8.68
9500	11.2	8.35
9750	11.2	8.14
10000	10.9	7.74
10250	10.6	7.33
10500	10.4	6.96
10750	10.6	6.97
11000	9.0	5.79

LOSSES: 0.0 HP 0.0N\*M\*M  
 TOTAL ENGINE: 12.1HP 12.50N\*M\*M

Displacement Correction  
Correction Factor: ISO 1585  
NOTE: Load Cell Included.

TEST NAME	MAX POWER.	MAX TORQUE	Temp. °C	Humidity %	Pressure	KMH	Date/Time
MEGA PRO T021	13.8 (13.8) / 6150	16.12 (16.12) / 6100	31.9 °C	52 %	1000.0 mbar	83.0	10/10/2017 10:03:35

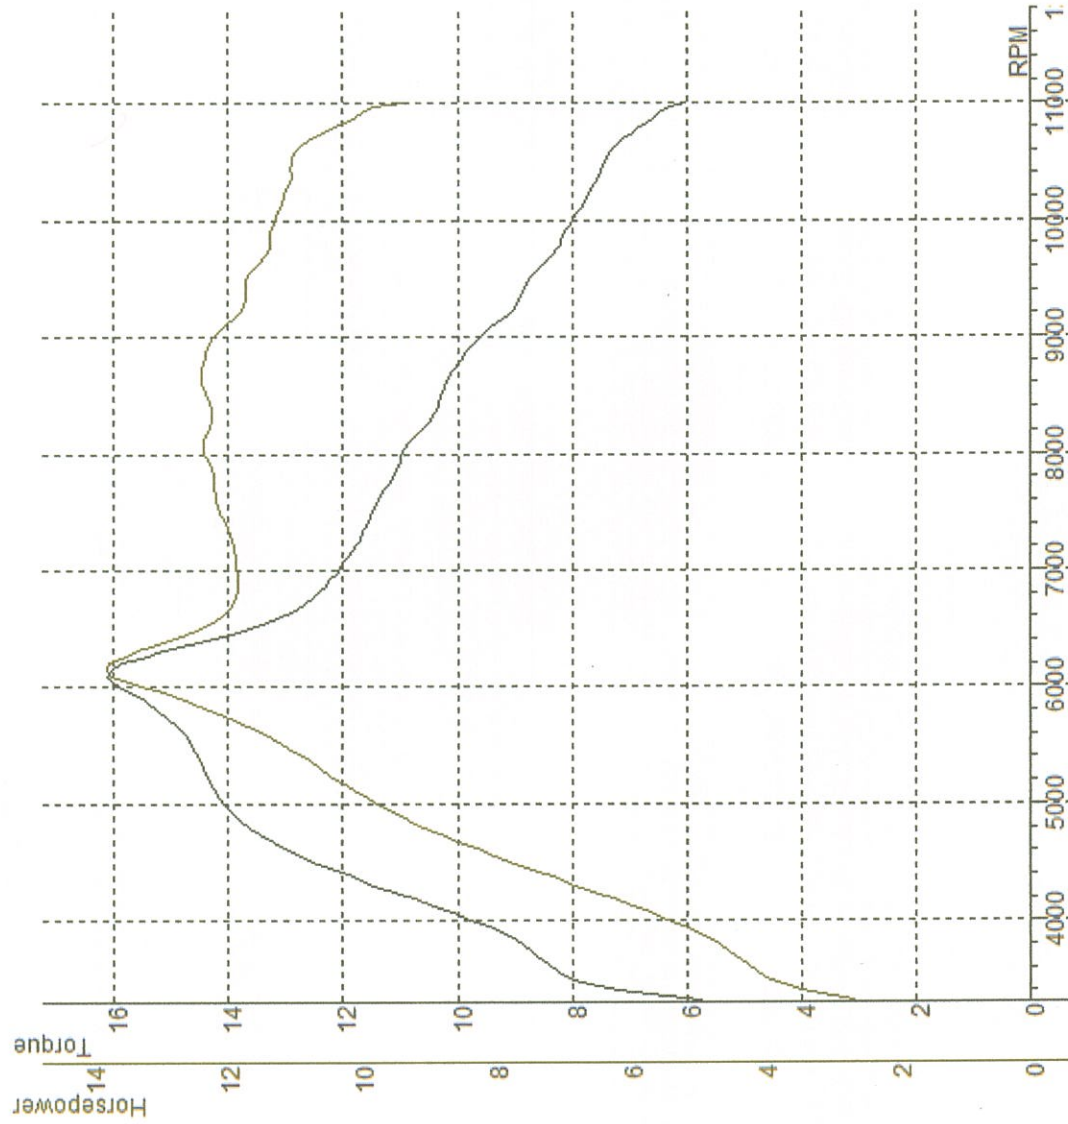

DATA FOR TEST: MEGA PRO T021


Comments  
COIL RACING BUSI RACING

RPM	HP (HP)*M	HP (HP)*M	T (N*M)*M
3250	3.0	6.42	0.52
3500	4.0	8.14	0.62
3750	4.7	8.85	0.74
4000	5.4	9.76	0.82
4250	6.8	11.47	0.92
4500	8.0	12.72	1.00
4750	9.0	13.63	1.08
5000	9.9	14.15	1.16
5250	10.6	14.43	1.24
5500	11.2	14.64	1.30
5750	12.3	15.25	1.38
6000	13.3	15.89	1.44
6100	13.7	16.12	1.48
6150	13.8	16.06	1.50
6250	13.6	15.55	1.54
6500	12.3	13.51	1.64
6750	11.8	12.50	1.74
7000	11.8	12.05	1.84
7250	11.9	11.71	1.94
7500	12.1	11.50	2.04
7750	12.2	11.16	2.16
8000	12.3	10.96	2.26
8250	12.2	10.52	2.38
8500	12.3	10.27	2.50
8750	12.3	9.99	2.62
9000	12.2	9.60	2.74
9250	11.7	8.99	2.88
9500	11.7	8.71	3.02
9750	11.4	8.26	3.16
10000	11.2	7.96	3.32
10250	11.1	7.64	3.48
10500	11.0	7.41	3.64
10750	10.5	6.87	3.82
11000	9.3	5.98	4.10

LOSSES: 0.0 HP  
TOTAL ENGINE: 13.8 HP  
0.0N\*M\*M  
16.12N\*M\*M

Displacement Correction  
Correction Factor: ISO 1585  
NOTE: Load Cell Included.

TEST NAME MEGA PRO T022 | MAX POWER. 12.4 (12.4) / 8166 | MAX TORQUE 12.10 (12.10) / 6804 | Temp. °C 31.9 °C | Humidity % 52 % | Pressure 1000.0 mbar | KMH 83.1 | Date/Time 10/10/2017 10:03:49

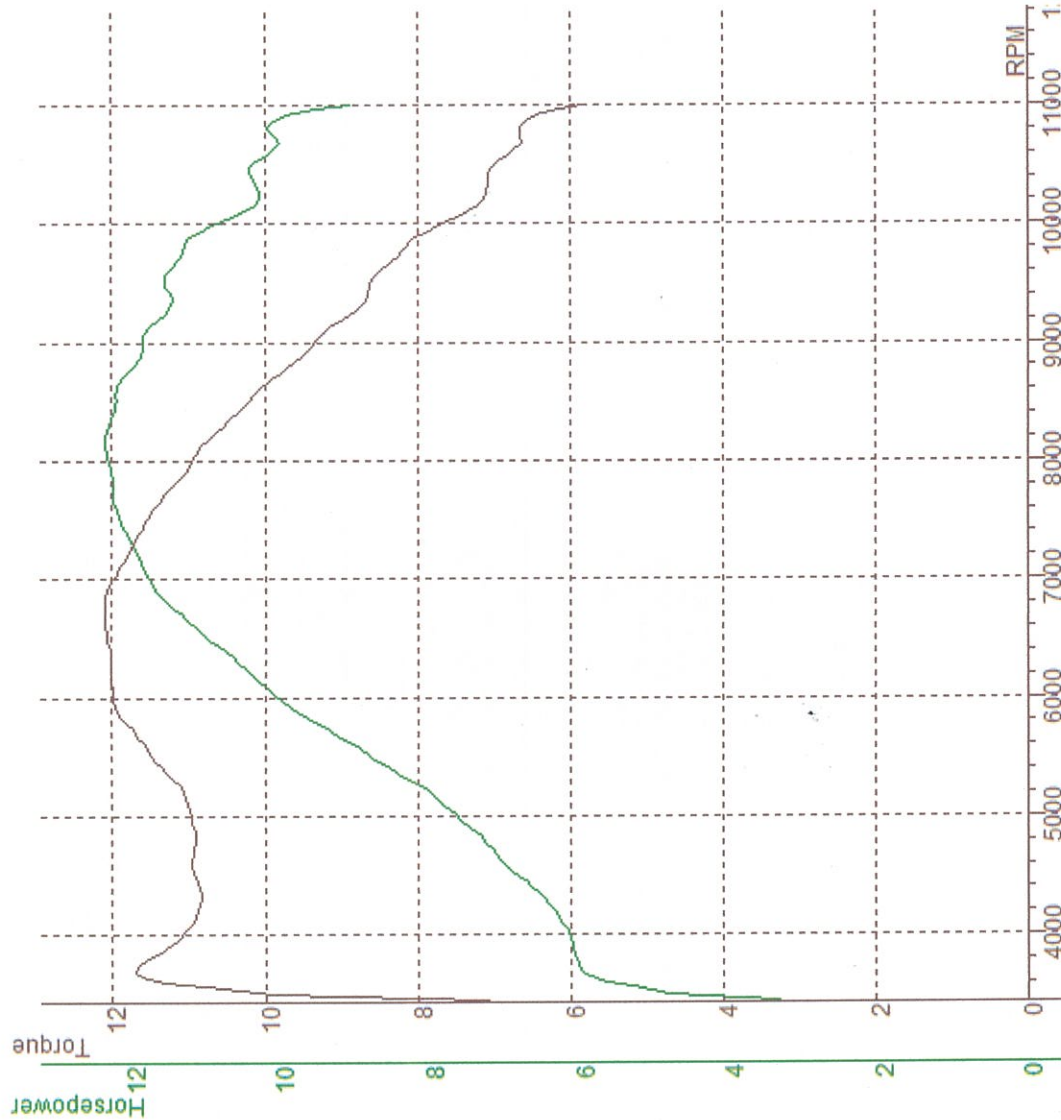

DATA FOR TEST: MEGA PRO T022


Comments  
COIL RACING BUSI RACING

RPM	HP (HP)Q (N*M*M)	T
3250	4.1	8.65
3500	5.3	10.79
3750	6.1	11.53
4000	6.2	11.05
4250	6.4	10.85
4500	6.9	10.94
4750	7.2	10.92
5000	7.7	10.97
5250	8.2	11.13
5500	8.8	11.48
5750	9.5	11.81
6000	10.1	11.99
6250	10.5	12.01
6500	11.0	12.08
6750	11.5	12.10
6804	11.5	12.10
7000	11.8	11.99
7250	11.9	11.76
7500	12.2	11.51
7750	12.2	11.24
8000	12.3	10.91
8166	12.4	10.76
8250	12.3	10.63
8500	12.2	10.20
8750	12.0	9.69
9000	11.8	9.32
9250	11.5	8.79
9500	11.5	8.60
9750	11.3	8.22
10000	10.7	7.56
10250	10.3	7.09
10500	10.3	6.94
10750	10.1	6.66
11000	8.7	5.56

LOSSES: 0.0 HP 0.0N\*M\*M  
TOTAL ENGINE: 12.4HP 12.10N\*M\*M

Displacement Correction  
Correction Factor: ISO 1585  
NOTE: Load Cell Included.

TEST NAME	MAX POWER.	MAX TORQUE	Temp. °C	Humidity %	Pressure	KMH	Date/Time
MEGA PRO T016	12.2 (12.2) / 9582	12.62 (12.62) / 3617	31.9 °C	52 %	1000.0 mbar	82.9	10/10/2017 10:02:26

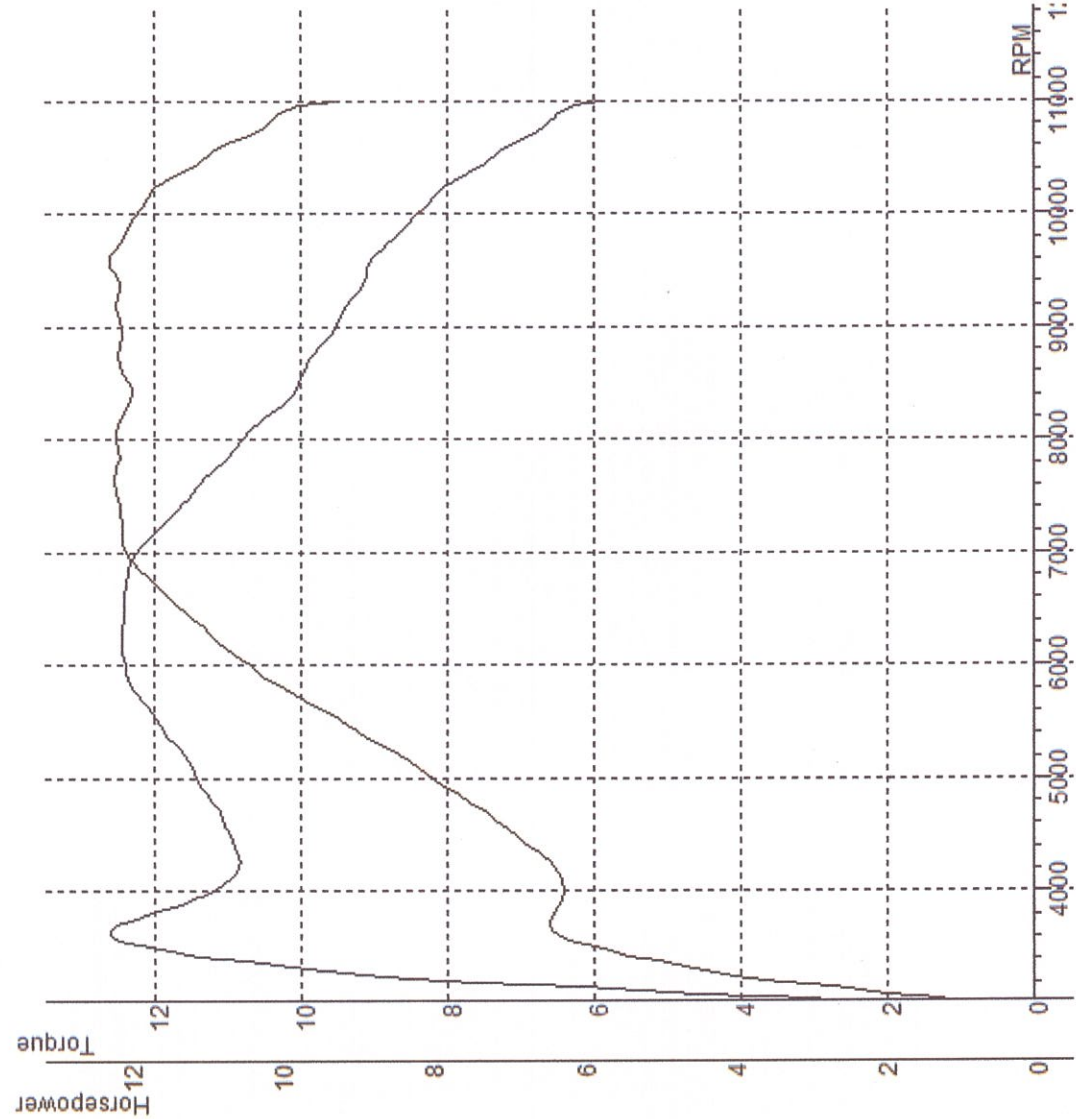

DATA FOR TEST: MEGA PRO T016


Comments  
COIL RACING BUSI RACING

RPM	HP (HP/Q) (N*M*M)	T
3000	1.9	4.59
3250	4.0	8.88
3500	6.0	12.29
3617	6.3	12.62
3750	6.4	12.12
4000	6.2	11.17
4250	6.4	10.84
4500	6.9	10.98
4750	7.4	11.16
5000	8.1	11.47
5250	8.5	11.67
5500	9.2	11.98
5750	9.9	12.30
6000	10.4	12.41
6250	10.9	12.46
6500	11.3	12.43
6750	11.8	12.37
7000	12.0	12.21
7250	12.1	11.83
7500	12.1	11.50
7750	12.1	11.16
8000	12.1	10.79
8250	12.0	10.33
8500	12.0	10.00
8750	12.1	9.82
9000	12.1	9.51
9250	12.1	9.27
9500	12.2	9.10
9582	12.2	9.06
9750	12.1	8.77
10000	11.9	8.41
10250	11.6	8.00
10500	11.0	7.39
10750	10.2	6.71

LOSSES: 0.0 HP 0.0N\*M\*M  
TOTAL ENGINE: 12.2HP 12.62N\*M\*M

Displacement Correction  
Correction Factor: ISO 1585  
NOTE: Load Cell Included.

TEST NAME: MEGA PRO T029    MAX POWER: 11.2 (11.2) / 7916    MAX TORQUE: 11.44 (11.44) / 5043    Temp. °C: 32.4 °C    Humidity %: 50 %    Pressure: 1000.0 mbar    KMH: 87.4    Date/Time: 10/10/2017 10:14:45

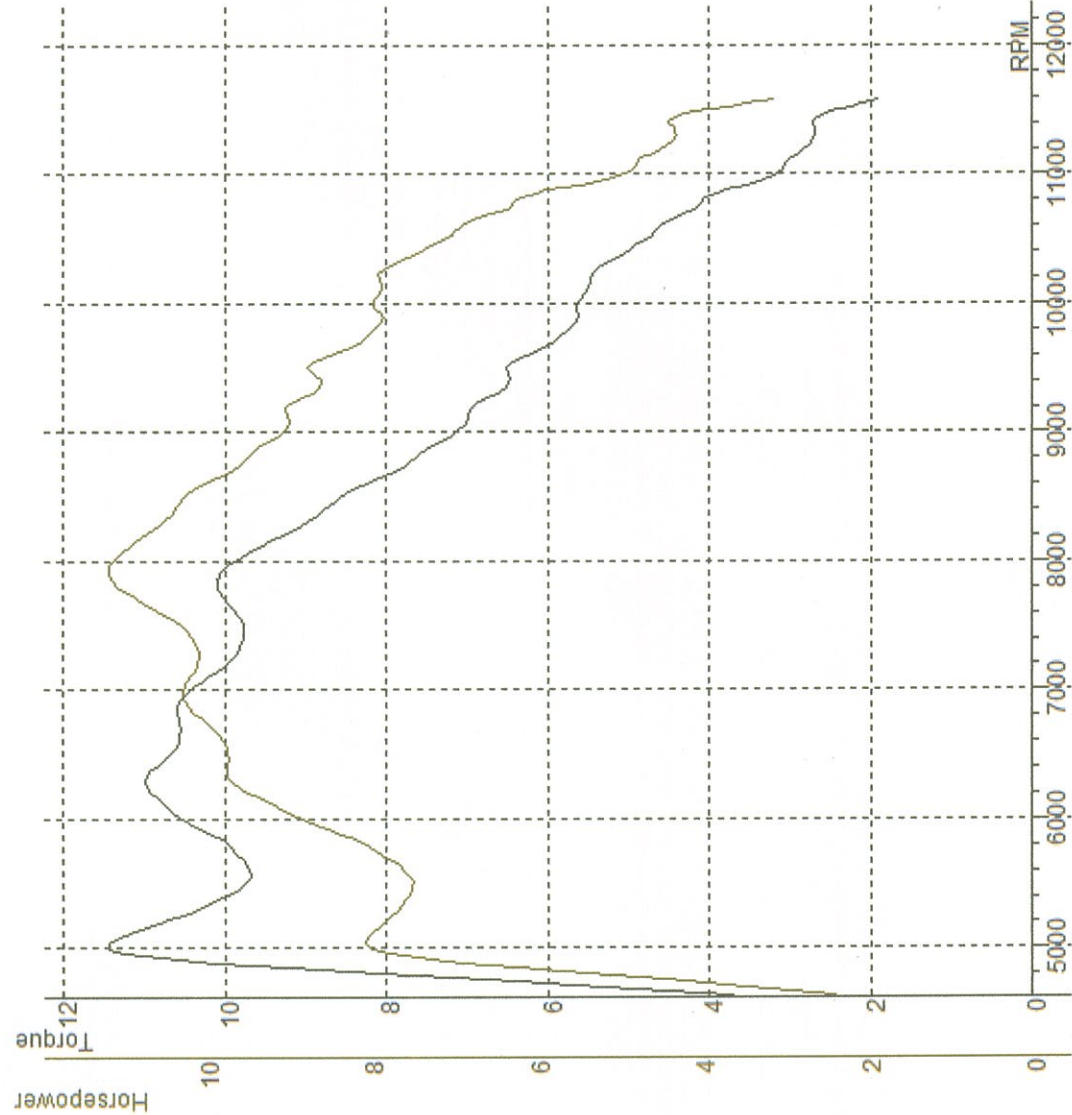

DATA FOR TEST: MEGA PRO T029


Comments  
COIL RACING BUSI RACING CDI RACING

RPM	HP (HP)*M	T (N*M)*M
4750	4.4	6.76
5000	8.1	11.44
5043	8.1	11.44
5250	7.7	10.52
5500	7.5	9.73
5750	8.0	9.92
6000	8.9	10.57
6250	9.7	10.99
6500	9.7	10.65
6750	10.1	10.57
7000	10.2	10.37
7250	10.1	9.90
7500	10.3	9.77
7750	11.0	10.06
7916	11.2	10.03
8000	11.1	9.79
8250	10.6	9.14
8500	10.2	8.50
8750	9.5	7.70
9000	9.0	7.11
9250	8.9	6.77
9500	8.8	6.52
9750	8.0	5.81
10000	7.9	5.61
10250	7.8	5.38
10500	7.1	4.75
10750	6.3	4.13
11000	4.9	3.16
11250	4.3	2.71
11500	3.9	2.39

LOSSES: 0.0 HP    0.0N\*M\*M  
TOTAL ENGINE: 11.2HP    11.44N\*M\*M

Displacement Correction  
 Correction Factor: ISO 1585  
 NOTE: Load Cell Included.

TEST NAME: MEGA PRO T028  
 MAX POWER: 10.5 (10.5) / 6197  
 MAX TORQUE: 12.20 (12.20) / 6157  
 Temp. °C: 32.4 °C  
 Humidity %: 50 %  
 Pressure: 1000.0 mbar  
 KMH: 88.3  
 Date/Time: 10/10/2017 10:14:31

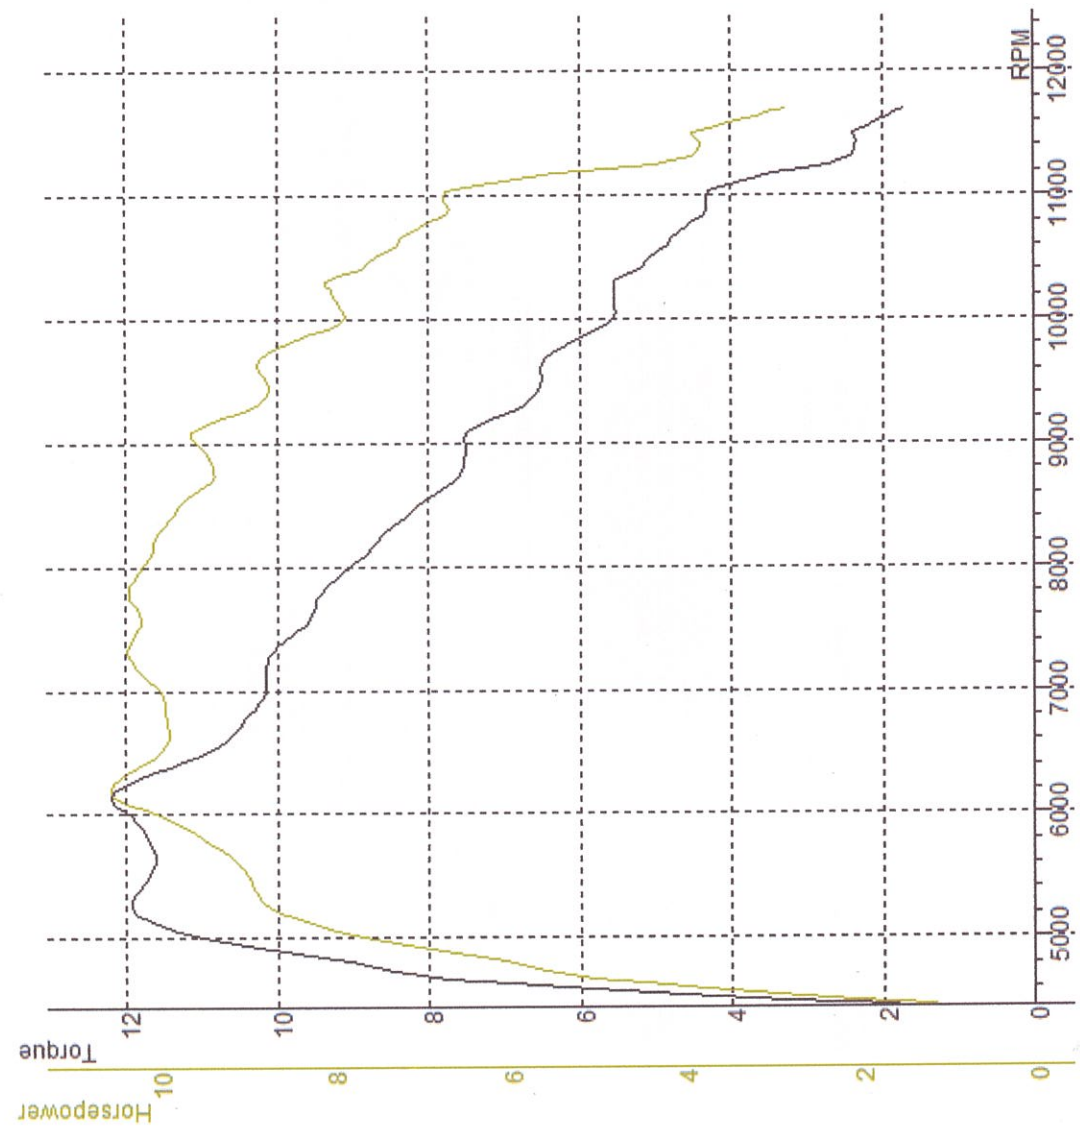

DATA FOR TEST: MEGA PRO T028


Comments  
 COIL RACING BUSI RACING CDI RACING

RPM	HP (HP)Q (N*M*M)	T
4500	2.9	4.64
4750	6.0	9.04
5000	7.6	10.97
5250	8.8	11.92
5500	9.0	11.65
5750	9.5	11.71
6000	10.1	12.04
6157	10.5	12.20
6197	10.5	12.13
6250	10.4	11.82
6500	9.9	10.91
6750	9.9	10.42
7000	10.0	10.15
7250	10.3	10.10
7500	10.2	9.63
7750	10.3	9.47
8000	10.1	8.98
8250	10.0	8.59
8500	9.7	8.07
8750	9.4	7.56
9000	9.6	7.54
9250	9.0	6.90
9500	8.8	6.51
9750	8.6	6.19
10000	7.8	5.54
10250	8.1	5.56
10500	7.5	5.06
10750	6.9	4.52
11000	6.7	4.30
11250	4.1	2.59
11500	3.8	2.34

LOSSES: 0.0 HP  
 TOTAL ENGINE: 10.5 HP  
 0.0N\*M\*M  
 12.20N\*M\*M

Displacement Correction  
Correction Factor: ISO 1585  
NOTE: Load Cell Included.

TEST NAME MEGA PRO T027    MAX POWER. 10.9 (10.9) / 7852    MAX TORQUE 11.13 (11.13) / 6531    Temp. °C 32.4 °C    Humidity % 50 %    Pressure 1000.0 mbar    KMH 88.3    Date/Time 10/10/2017 10:14:16

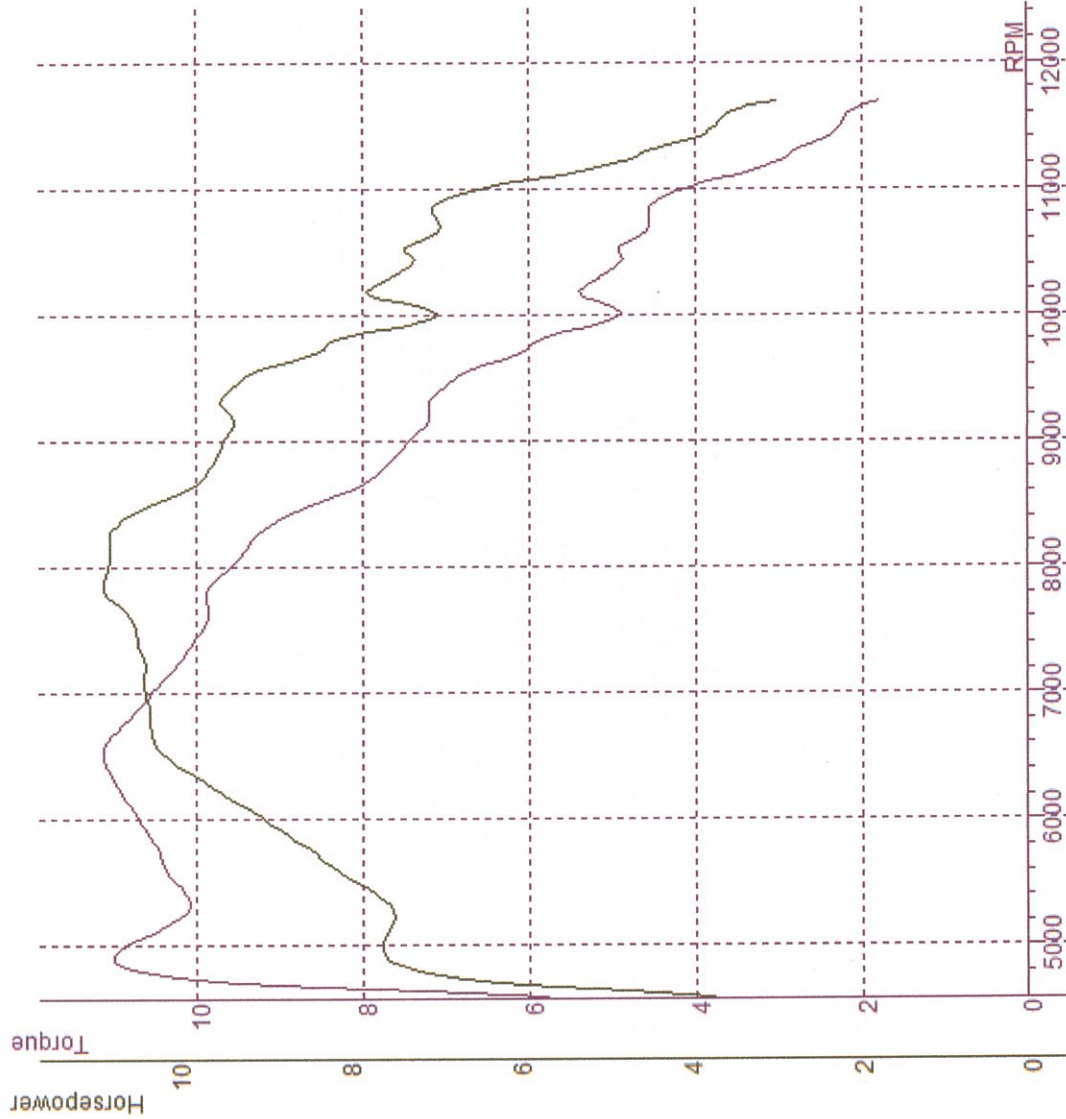

DATA FOR TEST: MEGA PRO T027

Comments  
COIL RACING BUSI RACING CDI RACING


RPM	HP (HP)*M*M	T (N*M)*M
4500	4.7	7.26
4750	7.1	10.68
5000	7.6	10.83
5250	7.4	10.11
5500	7.9	10.25
5750	8.5	10.47
6000	9.0	10.71
6250	9.6	10.95
6500	10.2	11.13
6531	10.2	11.13
6750	10.3	10.88
7000	10.4	10.53
7250	10.4	10.17
7500	10.5	9.92
7750	10.8	9.89
7852	10.9	9.84
8000	10.8	9.59
8250	10.8	9.26
8500	10.3	8.57
8750	9.6	7.79
9000	9.4	7.42
9250	9.4	7.21
9500	9.2	6.86
9750	8.2	5.97
10000	6.9	4.90
10250	7.6	5.21
10500	7.3	4.92
10750	6.9	4.56
11000	6.3	4.06
11250	4.6	2.86
11500	3.6	2.24

LOSSES: 0.0 HP    0.0N\*M\*M  
TOTAL ENGINE: 10.9HP    11.13N\*M\*M



Displacement Correction  
 Correction Factor: ISO 1585  
 NOTE: Load Cell Included.

TEST NAME	MAX POWER.	MAX TORQUE	Temp. °C	Humidity %	Pressure	KMH	Date/Time
MEGA PRO T026	10.7 (10.7) / 8556	11.84 (11.84) / 4976	32.4 °C	50 %	1000.0 mbar	88.1	10/10/2017 10:14:02

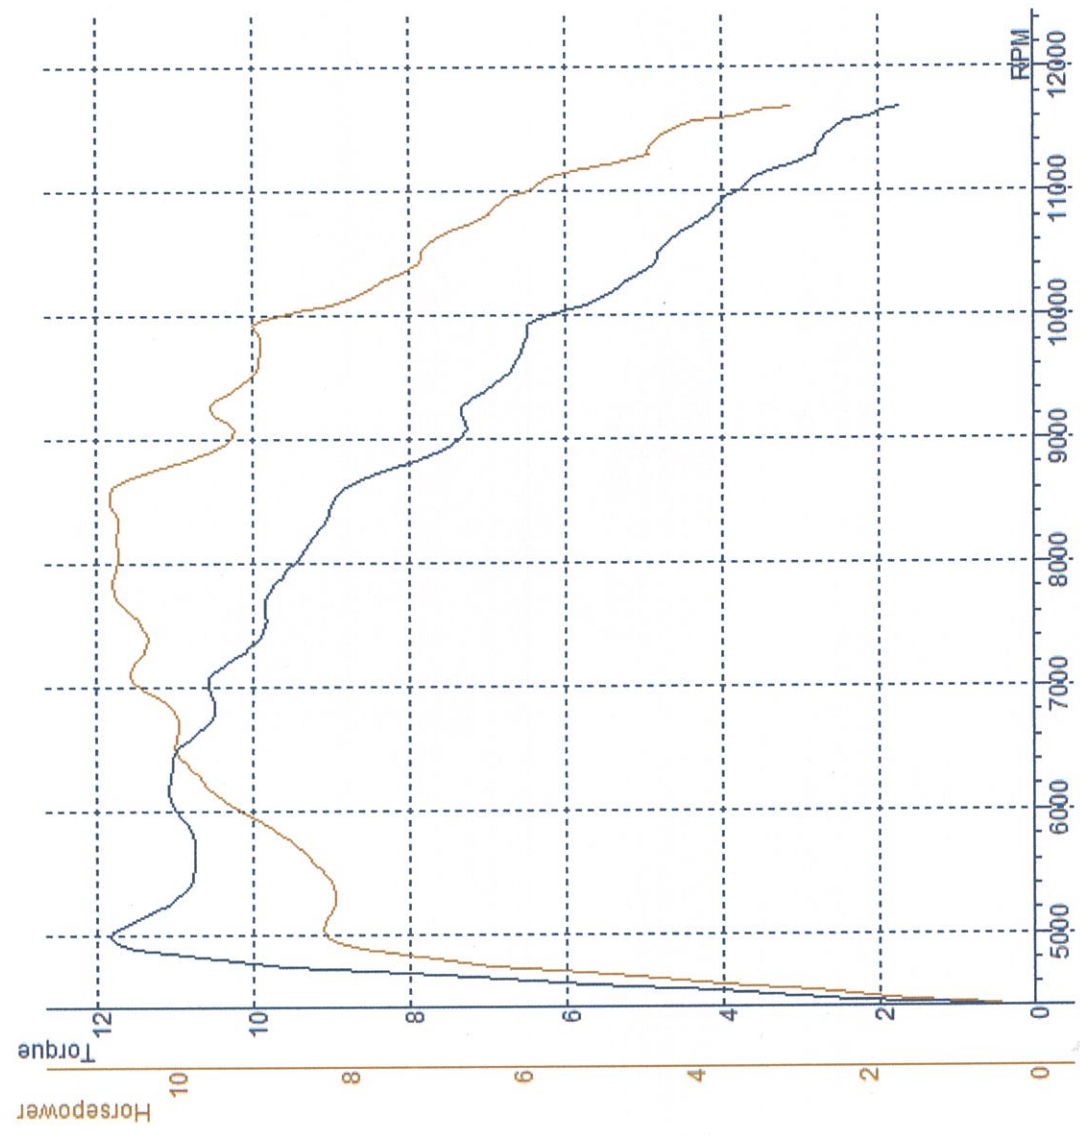

DATA FOR TEST: MEGA PRO T026


Comments  
 COIL RACING BUSI RACING CDI RACING

RPM	HP (HP)*M	HP (HP)*M	T
4500	2.5	4.06	0.54
4750	7.0	10.44	0.64
4976	8.2	11.84	0.72
5000	8.3	11.81	0.74
5250	8.1	10.98	0.86
5500	8.3	10.75	0.96
5750	8.6	10.75	1.06
6000	9.3	11.03	1.18
6250	9.7	11.05	1.28
6500	10.0	10.96	1.38
6750	10.0	10.50	1.50
7000	10.4	10.58	1.62
7250	10.3	10.12	1.74
7500	10.4	9.84	1.86
7750	10.7	9.78	1.98
8000	10.6	9.43	2.10
8250	10.6	9.13	2.24
8500	10.7	8.93	2.38
8556	10.7	8.93	2.38
8750	10.2	8.25	2.52
9000	9.3	7.32	2.68
9250	9.6	7.30	2.86
9500	9.1	6.79	3.02
9750	9.0	6.53	3.20
10000	8.8	6.20	3.40
10250	7.6	5.22	3.66
10500	7.1	4.78	3.92
10750	6.5	4.27	4.20
11000	5.9	3.77	4.54
11250	4.7	2.93	4.98
11500	4.2	2.58	5.48

LOSSES: 0.0 HP  
 TOTAL ENGINE: 10.7 HP  
 0.0N\*M\*M  
 11.84N\*M\*M

Displacement Correction  
 Correction Factor: ISO 1585  
 NOTE: Load Cell Included.

TEST NAME: MEGA PRO T025    MAX POWER: 10.4 (10.8) / 7332    MAX TORQUE: 12.10 (12.75) / 4976    Temp. °C: 32.4 °C    Humidity %: 50 %    Pressure: 1000.0 mbar    KMH: 87.8    Date/Time: 10/10/2017 10:13:48

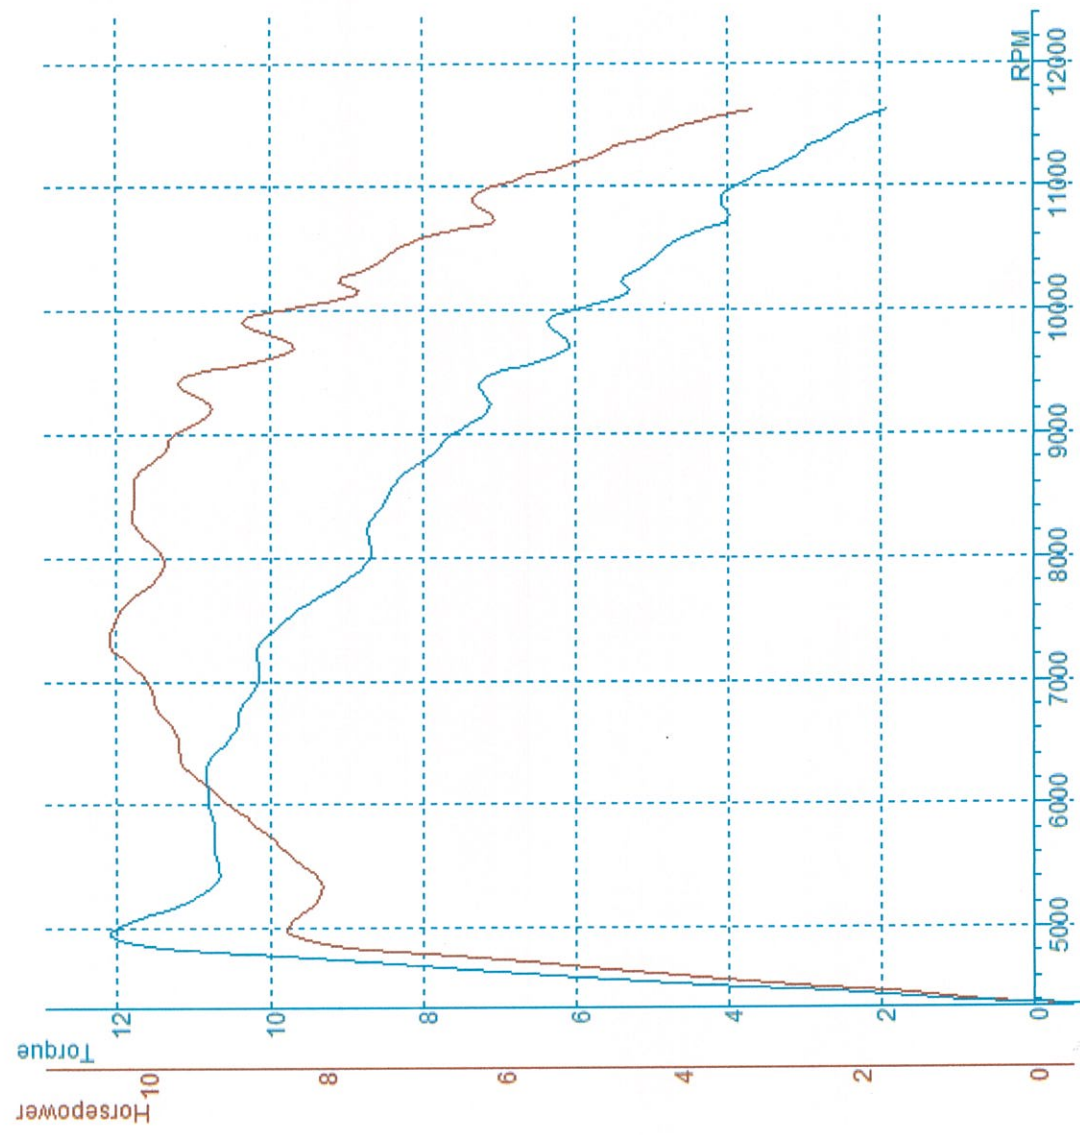

DATA FOR TEST: MEGA PRO T025


Comments  
 COIL RACING BUSI RACING CDI RACING

RPM	HP (HP)*M	HP (HP)*M	T
4500	2.7	4.30	0.56
4750	6.5	9.84	0.64
4976	8.4	12.10	0.74
5000	8.4	11.98	0.76
5250	8.0	10.85	0.88
5500	8.2	10.68	0.98
5750	8.6	10.72	1.08
6000	9.1	10.80	1.20
6250	9.5	10.83	1.30
6500	9.6	10.53	1.42
6750	9.9	10.37	1.54
7000	10.0	10.16	1.64
7250	10.4	10.17	1.76
7332	10.4	10.09	1.80
7500	10.3	9.73	1.90
7750	10.0	9.16	2.02
8000	9.8	8.69	2.16
8250	10.1	8.70	2.30
8500	10.1	8.44	2.44
8750	9.9	8.02	2.60
9000	9.6	7.56	2.76
9250	9.3	7.14	2.92
9500	9.3	6.95	3.10
9750	8.4	6.10	3.28
10000	8.4	5.96	3.50
10250	7.8	5.39	3.72
10500	7.1	4.79	3.98
10750	6.1	3.99	4.28
11000	6.0	3.83	4.62
11250	5.0	3.11	5.00
11500	3.9	2.37	5.56

LOSSES: -0.4 HP    -0.7N\*M\*M  
 TOTAL ENGINE: 10.8HP    12.75N\*M\*M

Displacement Correction  
Correction Factor: ISO 1585  
NOTE: Load Cell Included.

TEST NAME: MEGA PRO T009  
MAX POWER: 11.8 (11.8) / 7524  
MAX TORQUE: 12.02 (12.02) / 6356  
Temp. °C: 30.6 °C  
Humidity %: 59 %  
Pressure: 1000.0 mbar  
KMH: 83.0  
Date/Time: 10/10/2017 9:42:13

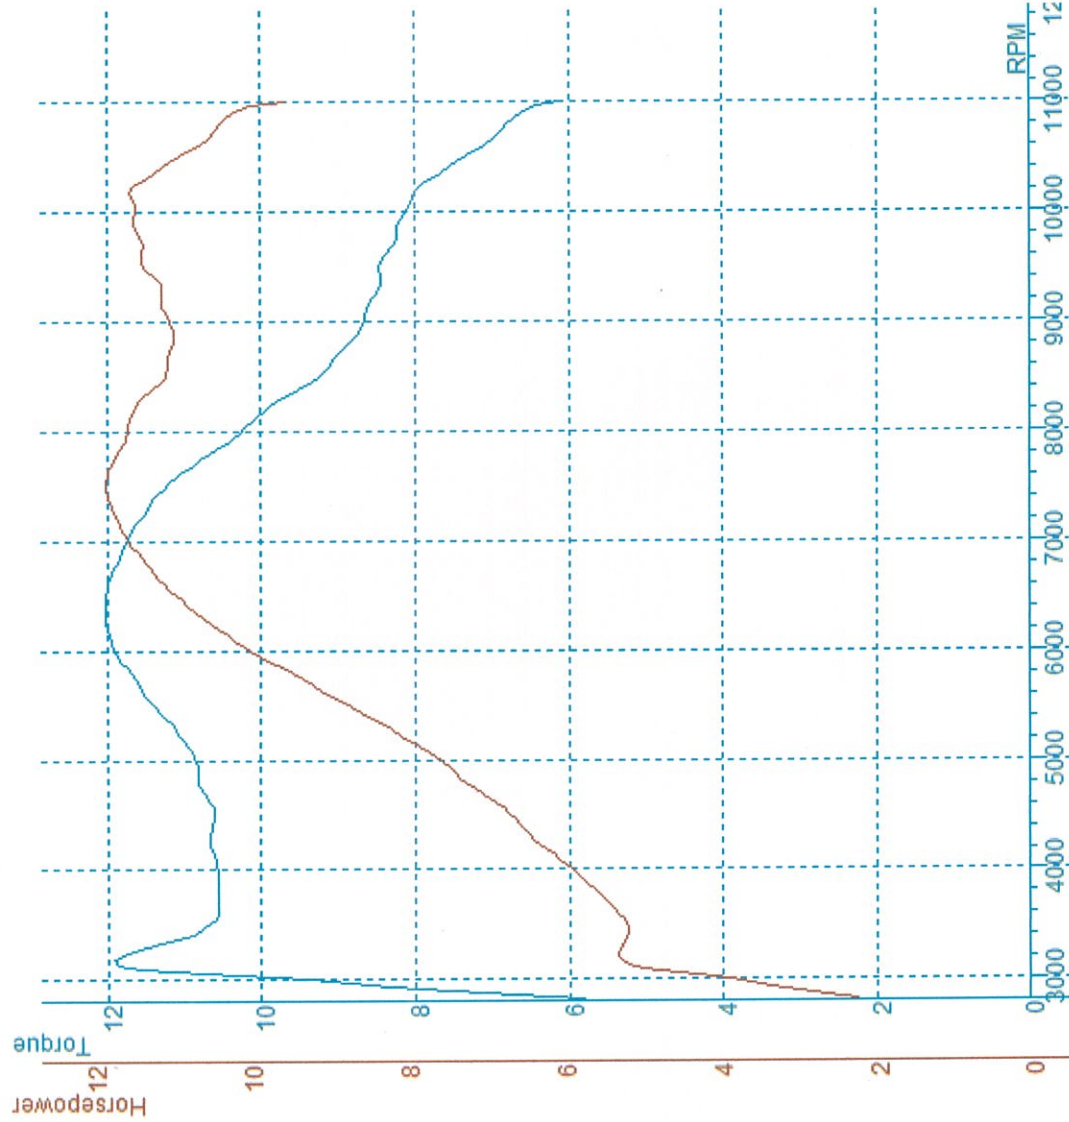


DATA FOR TEST: MEGA PRO T009

Comments STANDART	RPM	HP (HP)Q (N*M*M)	T
	2500	2.8	7.12
	2750	3.3	8.31
	3000	3.8	9.37
	3250	5.2	11.58
	3500	5.2	10.63
	3750	5.5	10.54
	4000	5.9	10.56
	4250	6.3	10.66
	4500	6.6	10.60
	4750	7.2	10.81
	5000	7.6	10.85
	5250	8.2	11.11
	5500	8.8	11.44
	5750	9.4	11.67
	6000	10.0	11.89
	6250	10.6	12.02
	6356	10.7	12.02
	6500	10.9	12.00
	6750	11.2	11.90
	7000	11.5	11.75
	7250	11.7	11.47
	7500	11.8	11.21
	7524	11.8	11.21
	7750	11.7	10.68
	8000	11.5	10.22
	8250	11.4	9.80
	8500	11.0	9.19
	8750	10.9	8.84
	9000	11.0	8.66
	9250	11.1	8.50
	9500	11.3	8.45
	9750	11.3	8.24
	10000	11.4	8.10
	10250	11.4	7.90
	10500	10.9	7.31
	10750	10.4	6.82
... (more)			

LOSSES: 0.0 HP  
TOTAL ENGINE: 11.8HP  
0.0N\*M\*M  
12.02N\*M\*M

Displacement Correction  
 Correction Factor: ISO 1585  
 NOTE: Load Cell Included.

TEST NAME: MEGAPRO T025  
 MAX POWER: 11.0 (11.0) / 7947  
 MAX TORQUE: 11.98 (11.98) / 4617  
 Temp. °C: 32.1 °C  
 Humidity %: 39 %  
 Pressure: 1000.0 mbar  
 KMH: 110.5  
 Date/Time: 25/08/2017 10:39:21

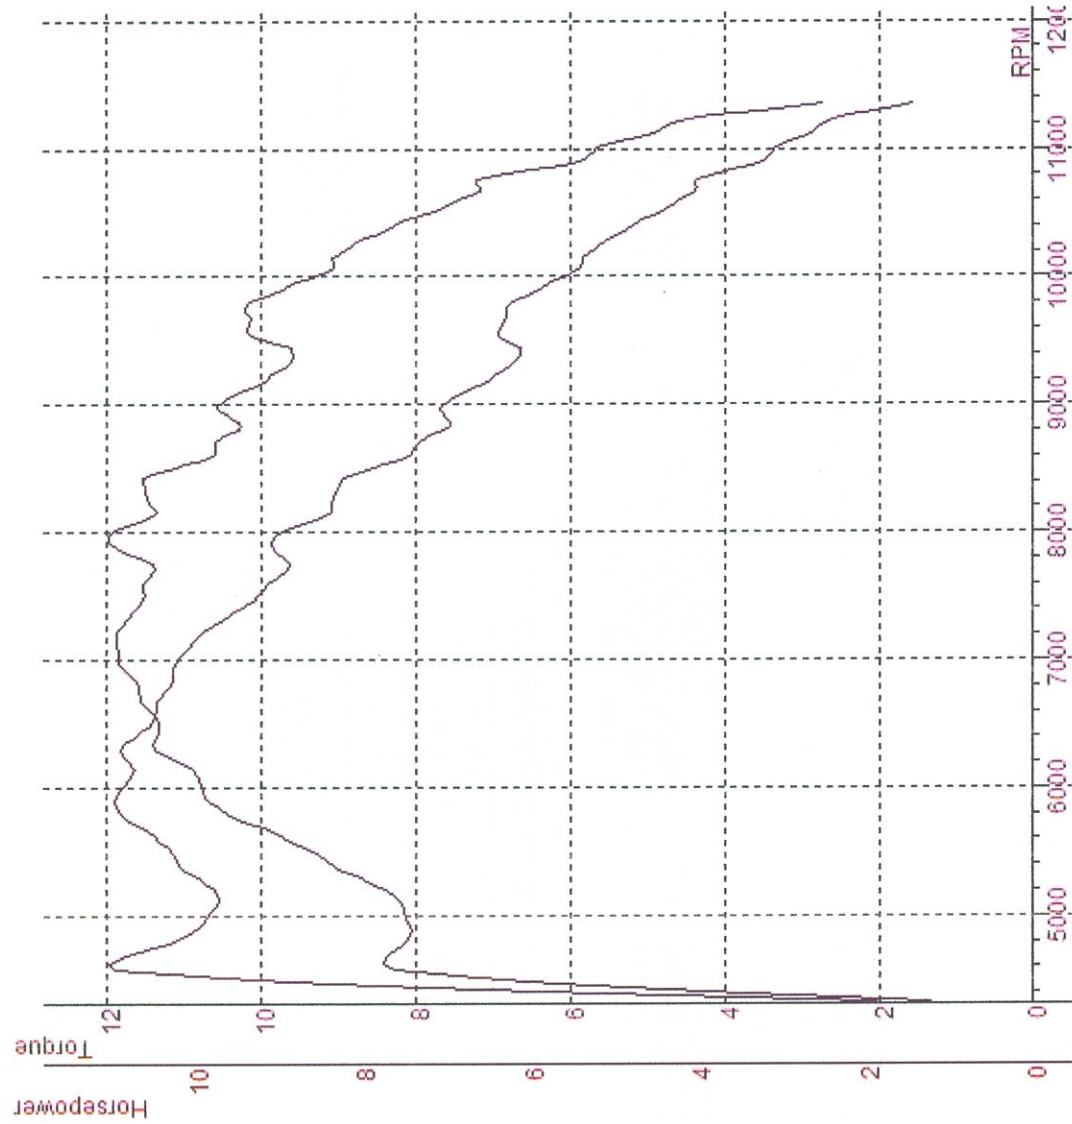

DATA FOR TEST: MEGAPRO T025

Comments  
 CDI RACING BUSI RACING

RPM	HP (HP)*M	HP (HP)*M	T (N*M)*M
4500	6.6	10.50	0.62
4617	7.7	11.98	0.70
4750	7.5	11.18	0.82
5000	7.5	10.65	1.00
5250	7.9	10.72	1.16
5500	8.7	11.20	1.34
5750	9.5	11.77	1.50
6000	9.9	11.76	1.66
6250	10.4	11.82	1.84
6500	10.4	11.38	2.00
6750	10.7	11.19	2.18
7000	10.9	11.02	2.36
7250	10.9	10.62	2.54
7500	10.6	10.00	2.74
7750	10.5	9.62	2.92
7947	11.0	9.84	3.08
8000	11.0	9.68	3.14
8250	10.6	9.07	3.36
8500	10.1	8.40	3.60
8750	9.6	7.78	3.84
9000	9.7	7.63	4.10
9250	9.0	6.84	4.40
9500	9.3	6.89	4.68
9750	9.4	6.79	4.98
10000	8.5	6.00	5.30
10250	8.1	5.56	5.68
10500	7.1	4.76	6.10
10750	6.6	4.35	6.60
11000	5.2	3.35	7.18
11250	3.8	2.41	8.08


LOSSES: 0.0 HP  
 TOTAL ENGINE: 11.0 HP  
 0.0N\*M\*M  
 11.98N\*M\*M

Displacement Correction  
Correction Factor: ISO 1585  
NOTE: Load Cell Included.

TEST NAME MEGAPRO T024  
MAX POWER 11.3 (11.3) / 7376

MAX TORQUE 11.0  
Temp. °C 32.1 °C  
Humidity % 39 %  
Pressure 1000.0 mbar  
KMH 110.0

Date/Time 25/08/2017 10:39:02

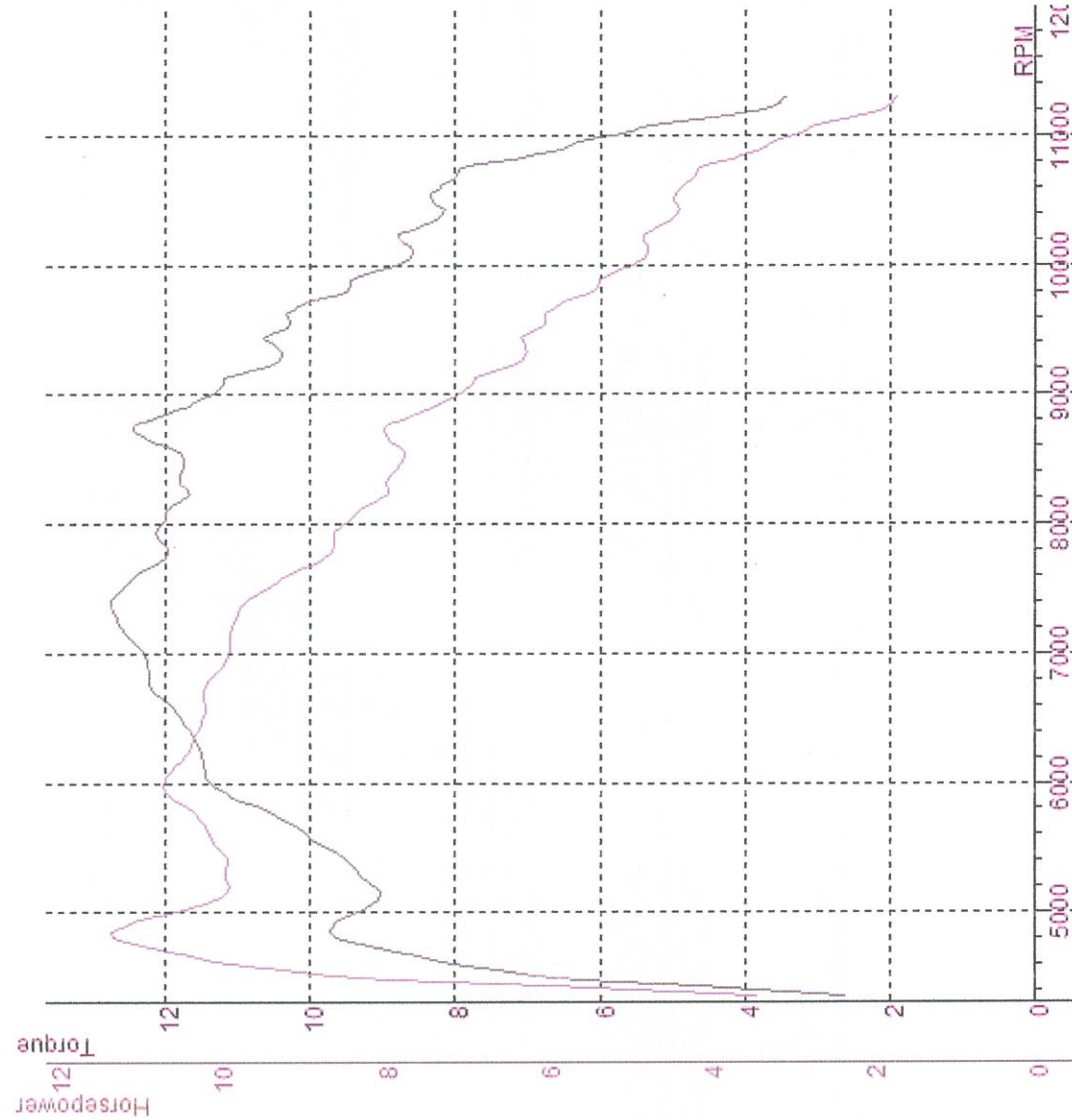

DATA FOR TEST: MEGAPRO T024


Comments  
CDI RACING BUSI RACING

RPM	HP (HPFQ (N*M*M))	T
4500	6.1	9.71
4750	8.3	12.43
4849	8.7	12.75
5000	8.3	11.83
5250	8.3	11.16
5500	8.7	11.30
5750	9.4	11.57
6000	10.2	11.99
6250	10.3	11.64
6500	10.5	11.44
6750	10.9	11.42
7000	11.0	11.10
7250	11.3	11.02
7376	11.3	10.91
7500	11.2	10.53
7750	10.7	9.73
8000	10.7	9.49
8250	10.4	8.91
8500	10.5	8.71
8750	11.0	8.91
9000	10.1	7.93
9250	9.3	7.08
9500	9.2	6.82
9750	8.8	6.35
10000	7.9	5.56
10250	7.7	5.33
10500	7.4	4.98
10750	7.1	4.64
11000	5.2	3.33
11250	3.1	1.97

LOSSES: 0.0 HP  
TOTAL ENGINE: 11.3HP  
0.0N\*M\*M  
12.75N\*M\*M

Displacement Correction  
Correction Factor: ISO 1585  
NOTE: Load Cell Included.

TEST NAME MEGAPRO T037  
MAX POWER. 11.93 (11.93) / 6081  
Temp. °C 33.3 °C  
Humidity % 36 %  
Pressure 1000.0 mbar  
KMH 110.6  
Date/Time 25/08/2017 10:59:20

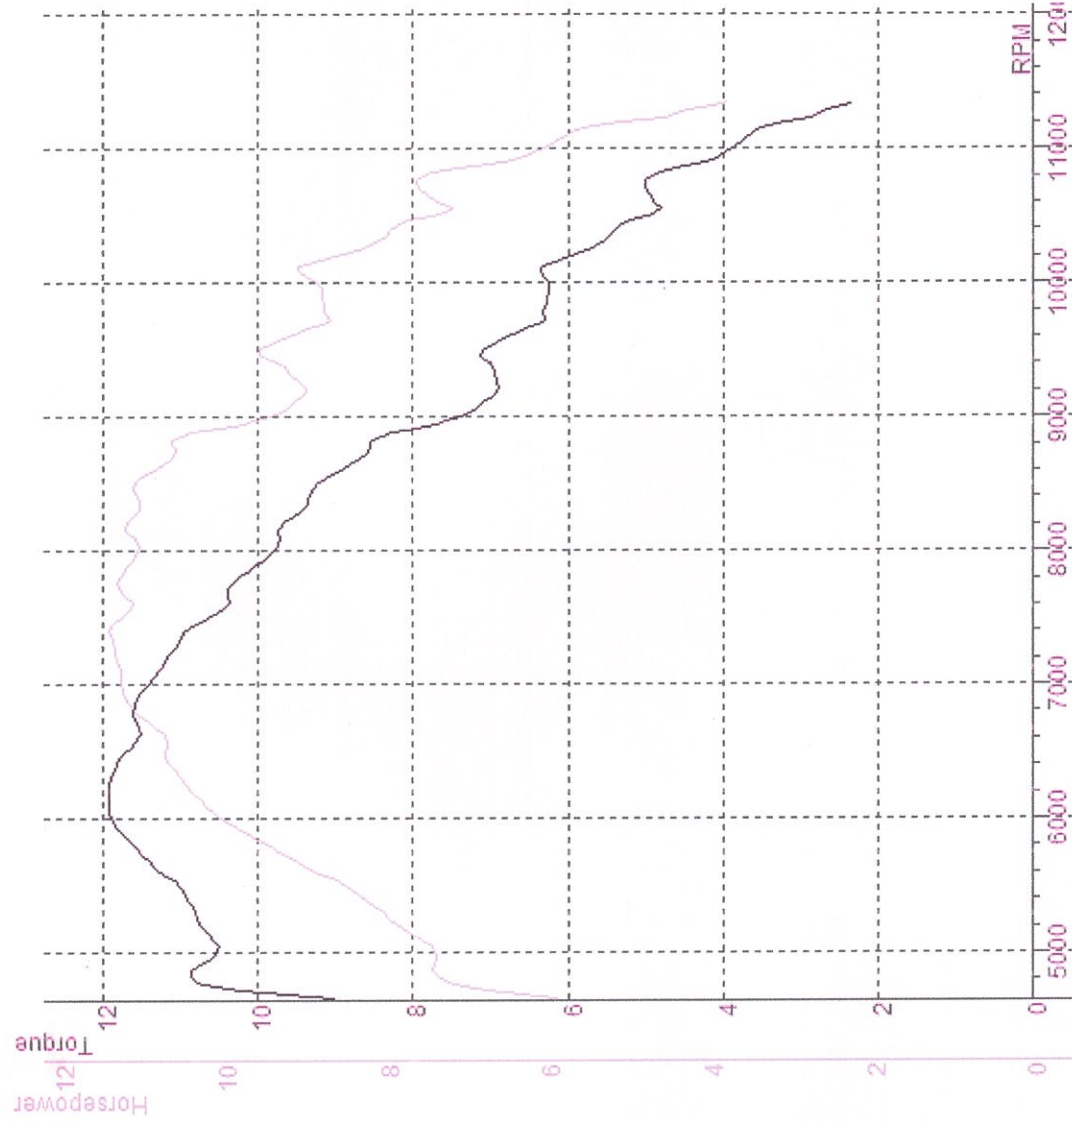

DATA FOR TEST: MEGAPRO T037


Comments  
BUSI RACING COIL RACING CDI RACING

RPM	HP (HP)Q (N*M*M)	T
4500	6.4	9.75
4750	7.2	10.70
5000	7.4	10.50
5250	8.0	10.80
5500	8.6	11.07
5750	9.4	11.56
6000	10.1	11.90
6081	11.93	11.93
6250	10.5	11.90
6500	10.7	11.64
6750	11.0	11.60
7000	11.3	11.42
7250	11.3	11.09
7386	11.4	10.96
7500	11.2	10.54
7750	11.3	10.33
8000	11.0	9.74
8250	11.1	9.54
8500	11.1	9.23
8750	10.6	8.56
9000	9.4	7.40
9250	9.1	6.93
9500	9.5	7.09
9750	8.7	6.31
10000	8.8	6.26
10250	8.3	5.68
10500	7.3	4.87
10750	7.6	5.01
11000	6.0	3.84
11250	4.4	2.78

LOSSES: 0.0 HP  
TOTAL ENGINE: 11.4 HP  
0.0N\*M\*M  
11.93N\*M\*M

Displacement Correction  
Correction Factor: ISO 1585  
NOTE: Load Cell Included.

TEST NAME: MEGAPRO T036  
MAX POWER: 11.4 (11.4) / 7696  
MAX TORQUE: 11.96 (11.96) / 5875  
Temp. °C: 33.3 °C  
Humidity %: 36 %  
Pressure: 1000.0 mbar  
KMH: 109.8  
Date/Time: 25/08/2017 10:59:02

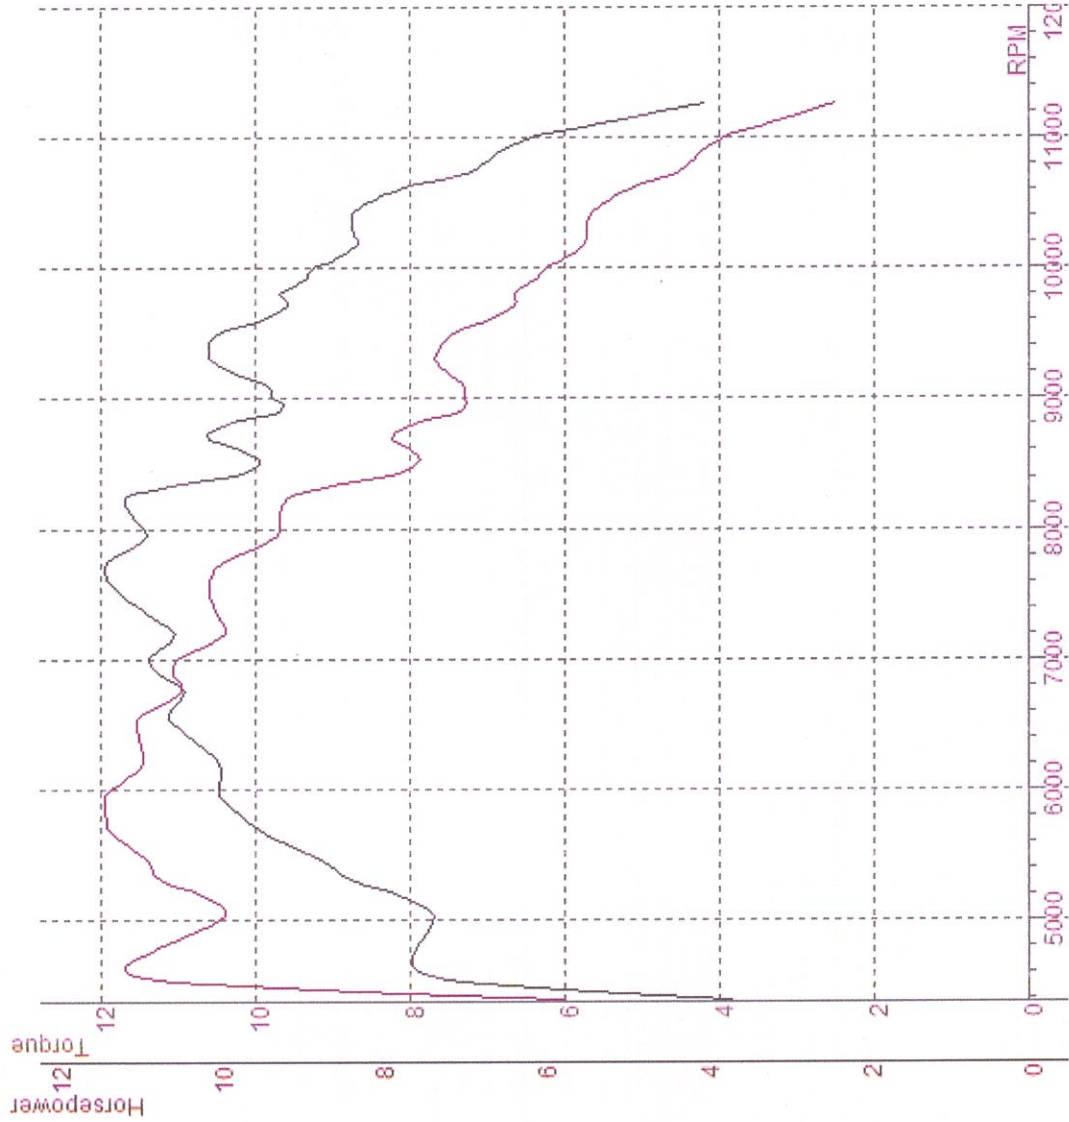

DATA FOR TEST: MEGAPRO T036

Comments


BUSI RACING COIL RACING CDI RACING

RPM	HP (HP/Q) (N*M*M)	T
4500	6.6	10.48
4750	7.6	11.28
5000	7.3	10.40
5250	8.2	11.07
5500	8.9	11.50
5750	9.6	11.92
5875	9.9	11.96
6000	10.0	11.82
6250	10.1	11.45
6500	10.6	11.53
6750	10.5	10.96
7000	10.8	10.95
7250	10.7	10.42
7500	11.2	10.61
7696	11.4	10.51
7750	11.3	10.34
8000	11.0	9.68
8250	11.1	9.54
8500	9.5	7.89
8750	10.1	8.13
9000	9.3	7.32
9250	10.0	7.65
9500	10.0	7.43
9750	9.2	6.65
10000	8.8	6.21
10250	8.3	5.73
10500	8.1	5.47
10750	6.9	4.52
11000	6.1	3.91
11250	4.1	2.59
		0.58
		0.78
		0.96
		1.12
		1.28
		1.44
		1.52
		1.62
		1.78
		1.96
		2.14
		2.32
		2.50
		2.68
		2.82
		2.88
		3.08
		3.28
		3.54
		3.78
		4.04
		4.30
		4.56
		4.86
		5.18
		5.52
		5.90
		6.36
		6.90
		7.66

LOSSES: 0.0 HP  
TOTAL ENGINE: 11.4HP  
0.0N\*M\*M  
11.96N\*M\*M

Displacement Correction  
Correction Factor: ISO 1585  
NOTE: Load Cell Included.

TEST NAME MEGAPRO T038  
MAX POWER 11.3 (11.3) / 7696  
MAX TORQUE 11.56 (11.56) / 6173  
Temp. °C 33.3 °C  
Humidity % 36 %  
Pressure 1000.0 mbar  
KMH 111.5  
Date/Time 25/08/2017 10:59:39

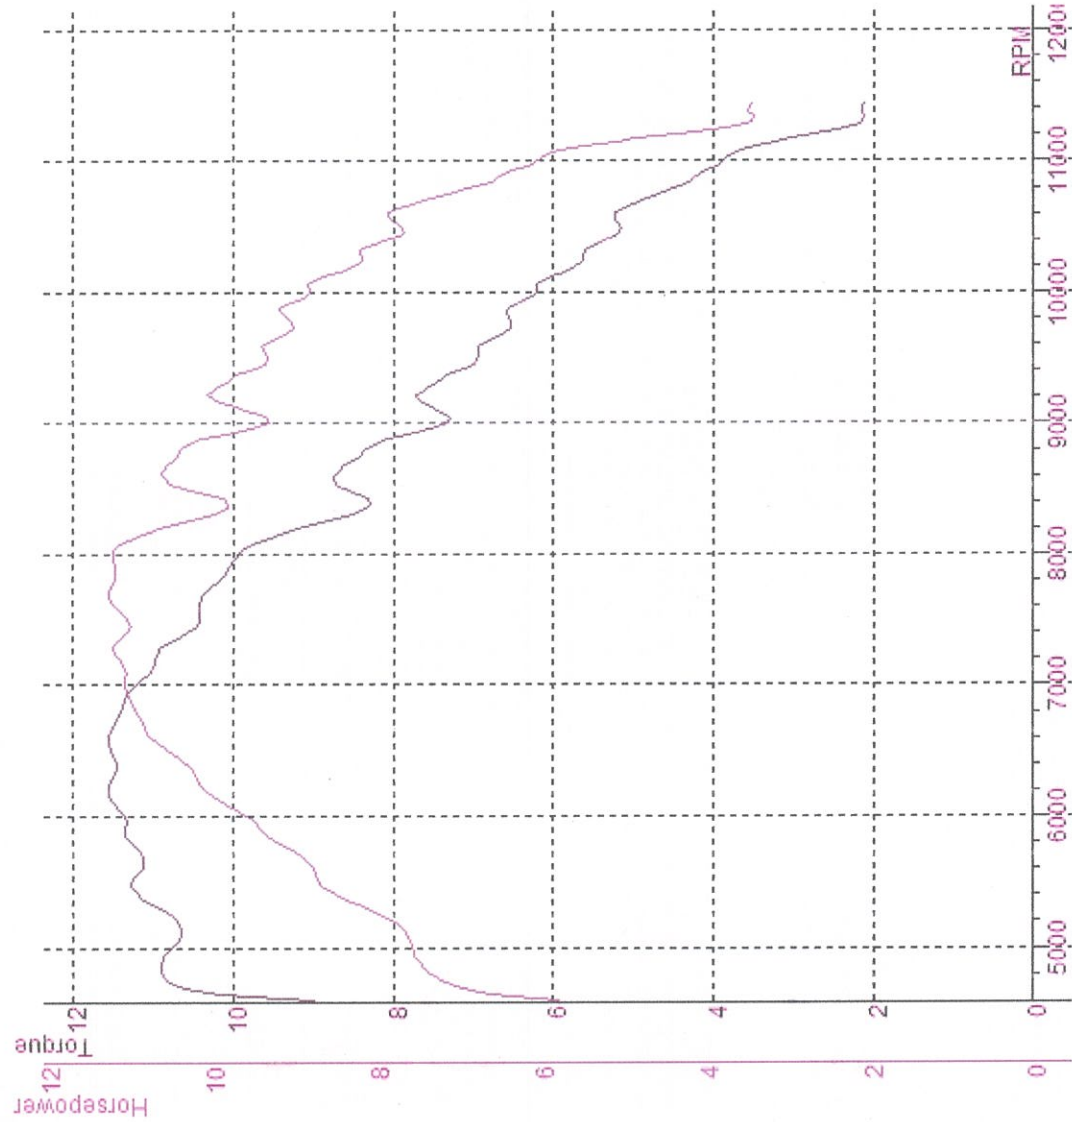

DATA FOR TEST: MEGAPRO T038

Comments  
BUSI RACING COIL RACING CDI RACING


RPM	HP (HP)*M	HP (HP)*M	T
4500	6.3	9.69	0.52
4750	7.2	10.87	0.62
5000	7.6	10.76	0.80
5250	8.0	10.83	0.98
5500	8.7	11.24	1.16
5750	9.1	11.21	1.32
6000	9.7	11.40	1.50
6173	10.0	11.56	1.60
6250	10.2	11.53	1.66
6500	10.6	11.54	1.82
6750	10.9	11.43	2.00
7000	11.1	11.18	2.18
7250	11.2	10.94	2.36
7500	11.0	10.42	2.54
7696	11.3	10.38	2.68
7750	11.2	10.23	2.74
8000	11.2	9.90	2.94
8250	10.3	8.82	3.16
8500	10.3	8.61	3.38
8750	10.4	8.42	3.62
9000	9.3	7.30	3.88
9250	10.0	7.63	4.14
9500	9.3	6.94	4.42
9750	9.0	6.53	4.72
10000	8.8	6.22	5.02
10250	8.2	5.63	5.40
10500	7.7	5.19	5.78
10750	7.0	4.62	6.22
11000	6.0	3.86	6.74
11250	3.6	2.26	7.60

LOSSES: 0.0 HP  
TOTAL ENGINE: 11.3HP  
0.0N\*M\*M  
11.56N\*M\*M



Displacement Correction  
Correction Factor: ISO 1585  
NOTE: Load Cell Included.

TEST NAME	MAX POWER.	MAX TORQUE	Temp. °C	Humidity %	Pressure	KMH	Date/Time
MEGA PRO T002	11.8 (11.8) / 9659	11.60 (11.60) / 6529	30.2 °C	58 %	1000.0 mbar	103.4	10/10/2017 9:36:23

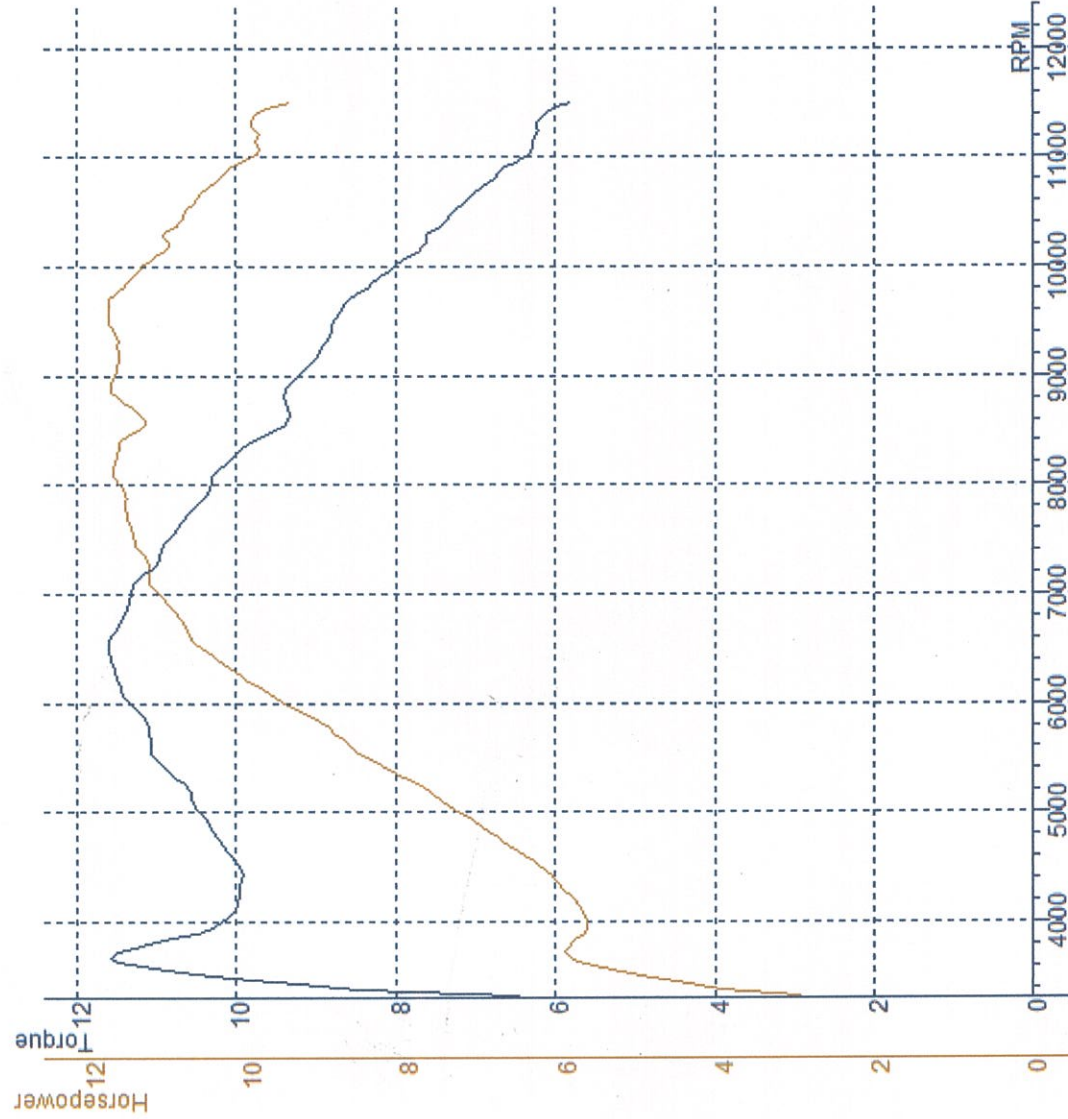

DATA FOR TEST: MEGA PRO T002

Comments  
STANDART

RPM	HP (HP/Q)	(N*M*M)	T
3250	3.5	7.55	0.52
3500	5.3	10.70	0.62
3750	5.9	11.19	0.78
4000	5.7	10.12	0.94
4250	5.9	9.96	1.10
4500	6.3	9.97	1.26
4750	6.8	10.22	1.42
5000	7.4	10.49	1.58
5250	7.8	10.64	1.72
5500	8.5	11.03	1.88
5750	9.0	11.08	2.02
6000	9.6	11.34	2.16
6250	10.2	11.51	2.32
6500	10.6	11.60	2.44
6529	10.6	11.60	2.46
6750	10.9	11.42	2.60
7000	11.2	11.32	2.74
7250	11.3	11.00	2.90
7500	11.5	10.81	3.06
7750	11.6	10.58	3.20
8000	11.6	10.32	3.36
8250	11.7	10.00	3.54
8500	11.4	9.46	3.72
8750	11.6	9.39	3.90
9000	11.7	9.17	4.08
9250	11.7	8.91	4.26
9500	11.8	8.74	4.46
9659	11.8	8.63	4.56
9750	11.6	8.43	4.66
10000	11.3	8.00	4.86
10250	11.1	7.62	5.08
10500	10.8	7.23	5.32
10750	10.4	6.83	5.56
11000	9.9	6.34	5.82
11250	9.9	6.22	6.08
11500	9.5	5.81	6.36
...	(more)		

LOSSES: 0.0 HP  
TOTAL ENGINE: 11.8HP  
0.0N\*M\*M  
11.60N\*M\*M