Proceedings of

2018 2nd International Conference on Imaging, Signal Processing and Communication (ICISPC 2018)

July 20-22, 2018

Kuala Lumpur, Malaysia



ISSN: 2472-8489

ISBN: 978-1-5386-6981-5

IEEE Catalog Number: CFP18VVN-USB

2018 2nd International Conference on Imaging, Signal Processing and Communication (ICISPC 2018)

Copyright ©2018 by the Institute of Electrical and Electronics Engineers, Inc. All rights reserved.

Copyright and Reprint Permission:

Abstracting is permitted with credit to the source. Libraries are permitted to photocopy beyond the limit of U.S. copyright law for private use of patrons those articles in this volume that carry a code at the bottom of the first page, provided the per-copy fee indicated in the code is paid through Copyright Clearance Center, 222 Rosewood Drive, Danvers, MA 01923.

Other Copying, reprint, or reproduction requests should be addressed to IEEE Copyrights Manager, IEEE Service Center, 445 Hoes Lane, P. O. Box 1331, Piscataway, NJ 08855-1331.

Compliant PDF Files

IEEE Catalog Number: CFP18VVN-ART

ISBN: 978-1-5386-6982-2

Conference USB Version

IEEE Catalog Number: CFP18VVN-USB

ISBN: 978-1-5386-6981-5

Additional copies of this publication are available from

Curran Associates, Inc. 57 Morehouse Lane Red Hook, NY 12571 USA +1 845 758 0400

+1 845 758 2633 (FAX)

email: curran@proceedings.com

2018 2nd International Conference on Imaging, Signal Processing and Communication

(ICISPC 2018)

Table of Contents

| Conference Committee v |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Computer Vision and Image Processing |
| Analogy-Based Common-Sense Knowledge for Opinion-Target Identification and Aggregation |
| TEXT: Traffic Entity eXtraction from Twitter Lim Cheng Yang, Bhawani Selvaretnam, Ian K. T. Tan, Ewe Kok Howg, Lau Heng Kar |
| Using Margin-Based Region of Interest Technique with Multi-task Convolutional Neural Network and Template Matching for Robust Face Detection and Tracking System |
| Study on Quantum Imaging Experimental Methods Based on the Light String Theory |
| An Efficient Algorithm for Vectorization of Remote Sensing Raster Data |
| Image Interpolation Based on Adaptive Neuro-Fuzzy Inference System |
| Computing at the Edge Cloud: Performance Analysis of an Image Comparison Web Service |
| An Efficient Approach Based on Image Pixel and Semantic Features towards Video Retrieval |
| Nasolabial Folds Extraction Based on Neural Network for the Quantitative Analysis of Facial Paralysis |
| Hui Li, Kaijie Wu |
| Robust Human Detection Using Sparse Aggregate Channel Features |
| Fawad, Zeeshan Kaleem, Muhammad Yousaf, Adeel Akram, Muhammad Adeel Asghar, Muhammad Jamil |

| Vision-Based Bus Route Number Reader for Visually Impaired Travelers |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Pitchakorn Wongta, Thanarat H. Chalidabhongse |
| A Color-Based High Temperature Extraction Method in Breast Thermogram to Classify Cancerous and Healthy Cases Using SVM |
| Khaleel Al-Rababah, Shyamala Doraisamy, Mas Rina, Fatimah Khalid |
| Feature Extraction for Quality Modeling of Malang Oranges on an Automatic Fruit Sorting System 7 Karisma Trinanda Putra, Tony Khristanto Hariadi, Slamet Riyadi, Anna Nur Nazilah Chamim |
| Performance of Lacunarity Features for Classifying Thyroid Nodule Using Thyroid Ultrasound Images |
| Eka Legya Frannita, Hanung Adi Nugroho, Anan Nugroho, Zulfanahri, Igi Ardiyanto |
| Communication and Information System |
| Critical Review of Topology Based Routing Protocols in VANETs |
| Faizan Ali Siddiqui, Liu Qingling, Zhang Chaozhu, Saifullah Adnan |
| Bayesian Channel Estimation in Massive MIMO System |
| Muhammad Irshad Zahoor, Dou Zheng, Sikander Ayub, Muhammad Waqas |
| On the Significance of RSSI Modeling Studies for Wireless Sensor Networks in Mines |
| Amit Swain, Mahesh Bepari, Nimish Patnaik, H. B. Sahu and S. K. Das |
| Performance of Ergodic and Outage Capacities in the Presence of Random Blockage under Generalize Fading Channels |
| Fares S. Almehmadi |
| Efficient Transmission of Geo-localization Information for Pervasive Wireless Networking |
| Block Sparse Bayesian Learning for Bursty Impulsive Noise Detection in Broadband PLC 11 |
| Prita Dewi Mariyam, Jing Liu, Filbert H. Juwono, Dadang Gunawan |
| Performance and Cost Analysis of an NB-IoT Based Smart Factory Solution with OneNet Cloud 12 Yan Lu, Yi Zhou, En Tong, Fei Ding, Jingye Wu |
| Angle-of-Arrival Analysis of Multi-channel Stereo Ultrasonic Signal for Angular Coordinates Positionin |
| Woottichai Nonsakhoo, Saiyan Saiyod, Nunnapus Moungmingsuk |
| Variable IIR Digital Band-Pass and Band-Stop Filters |

| 133 |
|----------------------------------------------------------------------------------------------------|
| S. Y. Lee, W. S. Yap, Y. C. Hum, B. M. Goi, Y. K. Tee |
| Enhancement of RF Power Measurement in 1/f Noise Using FPGA |
| Nuzulan Naim Zulkipli, Ahmad Zuri Sha'ameri, Zulfakar Aspar, Ghazali Hussin |
| Voice Signal Encryption Scheme Using Transformation and Embedding Techniques for Enhanced Security |
| PL. Chithra, Aparna R. |
| Study of Speech Enhancement Based on the Second-Order Differential Microphone Array |
| ATM Tracker: Tracking the Status of Automatic Teller Machine for Users' Easiness |
| A Mobile Camera Based Navigation System for Visually Impaired People |
| A Text Preprocessing Framework for Text Mining on Big Data Infrastructure |
| |

Author Index

Preface

It's our great pleasure to welcome you to Kuala Lumpur and the 2nd International Conference on

Imaging, Signal Processing and Communication (ICISPC 2018). The main theme of the ICISPC 2018 is

"Emerging Technology for Sustainable Tomorrow". Addressing this theme are 4 distinguished keynote speakers and 35 oral presenters in technical sessions. Like last year ICISPC, ICISPC 2018 aims to bring

together international academicians, scientists and industrialists for knowledge sharing, exchange of

ideas, collaborations and presentation of their research outcomes in imaging, signal processing and

communication fields

ICISPC 2018 proceedings documents the accepted papers from universities, research institutes and

industries, etc. The submitted papers have been gone through a rigorous review and the papers are

selected based on quality and relevancy to the conference. The proceedings presents readers with the

recent advancement in the field of Imaging Sensing Technique and Processing Technology;

Communication Technology; Multimedia and Communication Systems and so on.

We would like to thank all the authors who have contributed to this proceedings and also to reviewers,

speakers, chairpersons, sponsors and all the conference participants for their commitment, hard work

and support to ICISPC 2018.

We truly believe the participants will also find the proceeding meaningful and fruitful, and enjoy the

opportunity for setting up future collaborations. It is our sincere hope that ICISPC becomes the leading

conference in its specific topic areas.

Last but certainly not the lease. IACT and the Conference Committees welcome you to the ICISPC2018.

and we wish you to have an informative, productive and pleasant time at Kuala Lumpur.

Warmest regards,

Prof. Dr. Mohd Zaid Abdullah, Prof. Yulin Wang

Conference General Chair---ICISPC 2018

vi

Conference Committee

Conference Chairs

Prof. Yulin Wang, Wuhan University, China Prof. Dr. Mohd Zaid Abdullah, Universiti Sains Malaysia, Malaysia

Conference Program Chair

Prof. Mehmet Celenk, Ohio University, USA

Conference Local Committee

Prof. Ghazali Bin Sulong, Universiti Teknologi Malaysia, Malaysia

Conference Technical Committees

Prof. Syed Ab Rahman, Universiti Teknologi Malaysia, Malaysia

Prof. Wuqiang Yang, University of Manchester, UK

Prof. Lim Chee Peng, Deakin University, Australia

Prof. Wang Haigang, Chinese Academy of Sciences, China

Prof. Dr. Fei Ding, Nanjing University of Posts and Telecommunications, China

Prof. S. Manoharan, Karpagam College of Engineering, India

Prof. Dr. Muhammad Shaheen, Foundation University Islamabad, Pakistan

Assoc. Prof. Dr. Shahrel Azmin Sundi@Suandi, Universiti Sains Malaysia, Malaysia

Assoc. Prof. Dr. Muhammad Haroon Yousaf, University of Engineering and Technology Taxila, Pakistan

Dr. Nor Azmi Alias, Collaborative Research in Engineering Science and Technology Center, Malaysia

Dr. Nor Muzlifah Mahyuddin, Universiti Sains Malaysia, Malaysia

Dr. Jagadheswaran Rajendran, Universiti Sains Malaysia, Malaysia

Dr. Mohamad Adzhar Md. Zawawi, Universiti Sains Malaysia

Dr. Achmad Munir, Institut Teknologi Bandung, Indonesia

Dr. Wan Amir Fuad Wajdi Othman, Universiti Sains Malaysia, Malaysia

Dr. Suree Pumrin, Chulalongkorn University, Thailand

Dr. Mohamed Fauzi Packeer Mohamed, Universiti Sains Malaysia, Malaysia

Dr. Chen Wang, Huazhong University of Science and Technology, China

Dr. IMRAN MEMON, Zhejiang University, China

Prof. Dr. Hamid Ali Abed Al-asadi, Basra University, Iraq

Prof. Kaharudin Dimyati, University of Malaya, Kuala Lumpur, Malaysia

Prof. S. Salivahanan, SSN College of Engineering, India

Prof. Dr. Rajasvaran Logeswaran, Asia Pacific University, Malaysia

Assoc. Prof. Dr. Mohammad Faizal Ahmad Fauzi, Multimedia University, Malaysia

Assoc. Prof. Dr. Hezerul Abdul Karim, Multimedia University, Malaysia

Dr. Mohd Norzali Mohd, University Tun Hussein Onn Malaysia, Malaysia

Dr.Durgesh Samadhiya, National Applied Research Laboratories NAR Lab and National Chiao Tao University in Taiwan,India

Dr. Norzaini Rose Mohd Zain, Jalan Hospital Kuala Lumpur, Malaysia

Prof. Madhavi Devaraj, Mapua University, Philippines

Asst. Prof. Hum Yan Chai, Universiti Tunku Abdul Rahman, Malaysia

Asst. Prof. Tee Yee Kai, Universiti Tunku Abdul Rahman, Malaysia

Prof. Goi Bok Min, Universiti Tunku Abdul Rahman, Malaysia

Dr. Zulfakar Bin Aspar, University Technology Malaysia, Malaysia

Dr. Yuhendra, Padang Institute of Technology, Indonesia

Assoc. Prof. Dr. Pl.Chithra, University of Madras, India

Asst. Prof. Cheng Su, Zhejiang University, China

Asst. Prof. Aparna R. S.S.S.Shasun Jain College, India

Prof. Dr Ruksar Fatima, KBN College of Engineering Gulbarga Karnataka, India

Asst. Prof. Fares S. Almehmadi, Engineering University of Tabuk, Saudi Arabia

Asst. Prof. Abdur Rahman M. Maud, Institute of Space Technology, Pakistan

Asst. Prof. Dr. Sami ur Rahman, University of Malakand, Pakistan

Assoc. Prof. Shyamala Doraisamy, University of Putra Malaysia, Malaysia

Dr. Filbert Hilman Juwono, Curtin University Sarawak, Malaysia

Assoc. Prof. Siti Anom Ahmad, Universiti Putra Malaysia, Malaysia

Asst. Prof. Syed Omer Gilani, NUST, Paksitan

Dr. Hongjie Fan, Peking University, China

Assoc. Prof. Dr. Salekul Islam, United International University (UIU), Bangladesh

Asst. Prof. Zeeshan Kaleem, University of Engineering and Technology, Pakistan

Asst. Prof. Mas Rina, University of Putra Malaysia, Malaysia

Asst. Prof. Longjiang Li, University of Electronic Science and Technology of China, China

Dr. Slamet Riyadi, Universitas Muhammadiyah Yogyakarta, Indonesia

Dr. Ariel M. Sison, Emilio Aguinaldo College, Philippines

Asst. Prof. Nasif Muslim, United International University (UIU), Bangladesh

Asst. Prof. Muhammad Jamil, University of Engineering and Technology, Pakistan

Prof. Adeel Akram, University of Engineering and Technology, Pakistan

Feature Extraction for Quality Modeling of Malang Oranges on an Automatic Fruit Sorting System

Karisma Trinanda Putra, Tony Khristanto Hariadi, Slamet Riyadi, Anna Nur Nazilah Chamim Department of Electrical Engineering Universitas Muhammadiyah Yogyakarta Indonesia

e-mail: karisma@ft.umy.ac.id, tonykhariadi@umy.ac.id, riyadi@umy.ac.id, anna_nnc@umy.ac.id

Abstract—This paper evaluated some of the machine vision techniques to extract fruits characteristic, which in this case is Malang oranges. Appropriate algorithms are developed and implemented to extract features from local fruit based on Indonesian National Standard (SNI 3165: 2009) which is concerning to oranges. The research is done by analyzing fruit images, extracting HSV parameters and extracting feature using contour detection, hull convex and RGB histogram, A sensing machine which is consists of a photo box with a camera and a conveyor has been developed. The detection process can be done in real-time with the help of boxes equipped with adequate lighting. Convex hull analysis can be used to determine the diameter that has a great effect on the citrus fruit classification. While the red-green ratio can be used to label citrus fruits so that it can be used on a gradation-based fruit sorting machine. The performance was evaluated in terms of measurement accuracy which is above 88%. The research has the potential to be improved with the addition of an artificial intelligence-based decision system.

Keywords-contour detection; hull convex; RGB histogram; red-green ratio

I. Introduction

Tangerine or mandarin orange (Citrus reticulate) is one type of orange that has long been known and cultivated by people in Asia, especially in Indonesia. Besides being a commodity trading in the country, the fruit is also traded in the international market. Indonesia is one of the producers of orange which has big enough potency to fulfill consumer demand inside and outside the country. The center of tangerine production is now mostly found in East Java especially in Malang area. Given its natural resources, this area has the advantage to produce export-quality oranges. To improve the quality in order to compete in the domestic and international market, it is necessary to have a quality standard that can be applied by Indonesian farmers and acceptable by the international market. Indonesian National Standard (SNI 3165: 2009), concerning Tangerines is formulated by the Technical Committee 65-03 of the Ministry of Agriculture Republic of Indonesia as an effort to produce citrus which has the qualities according to market demand [1].

Currently, Indonesia is the second largest citrus importer country in ASEAN after Malaysia especially sweet oranges,

with an average import volume per year reaching 25,408 tons or equivalent to US \$ 17,464,186 per year. As for the type of tangerine, it reached about 100,813 tons per year with a value reaching US \$ 80,569,300 [2]. Not surprisingly, many imported oranges are found in almost all supermarkets including small traders. What is very sad is that imported oranges are laid out and better placed than national oranges. It seems that consumers are also less fond of their own oranges products because the quality is still inferior to imported oranges. The tendency to increase the import of citrus varieties indicates the existence of certain market segments (consumers) who want the type and quality of prime fruit that cannot be fulfilled by domestic producers. To supply these needs, import policy is opened, mostly from Australia, China and Pakistan. Actually, the condition of the oranges is not fresher than local oranges because it has been stored in cold storage for 6 months - 1 year.

Increased import of oranges can actually be a market opportunity as well as national oranges development opportunities along with increasing consumer preferences for good quality fruits. Opportunities to develop oranges cannot be separated from the national potential, such as the number of oranges production centers, the high diversity of citrus genetic resources, the availability of high quality national orange varieties including seeds, technology, and local market itself. It means that the national oranges have the opportunity to replace the existence of imported oranges as long as the government, citrus agribusiness and entrepreneurs have a high commitment to support the development of this national program. Therefore, the Indonesian government launched a strategic "Sustainable National Oranges Development Program" which is systematically arranged, comprehensively and involves several institutions including policy makers.

To support the national oranges development movement, there needs to be technology development in line with the increase of production capability. Post-harvest processing and packaging technology is needed to accelerate and synchronize processes that are currently still done conventionally with human assistance. The quality of oranges can be seen from the diameter, shape and also the color of the fruit skin [3]. The camera is used as a visual sensing to detect the characteristics of fruits. By equating the patterns that have been compiled in SNI 3165: 2009, a sensing system was created to model the fruit quality sorter

system and arrange them according to their color. This technology contributes to the development of fruit quality sorting machines as well as fruit preparations based on the color gradations of the fruit [4]-[8]. Fruit sorting system according to the color gradation can be applied to a fruit display on a supermarket. One of the characteristics of local fruit is its wide color variations. Preparation of oranges in columns according to the color gradation, will be a visual attraction for consumers to choose the fruit. In fact, in terms of taste, the quality of local oranges is not inferior to imported oranges.

II. RELATED WORK

Research that has been done previously discussed a lot about the classification of mandarin oranges. With modern computer vision techniques, manual sorting of fruits is being replaced with automated low cost and consistent approach with accuracy around 90% [9]. Other studies indicate that RGB parameters can be used to perform characterization of maturity of oranges [10]. RGB parameter has a weakness in the process of recording an image which is depend on the lighting and the quality of the camera. For this research, we used a box equipped with artificial lighting to help the camera capture a more constant image. Other research that has been done to classify the Thompson citrus fruit, demonstrates the power of computer vision techniques, which can extract about fourteen parameters from a single fruit [11].

For local fruit varieties, the research conducted is still minimal. Local oranges especially Malang oranges have color characteristics that cannot be used as a reference to determine fruit maturity, in contrast to imported oranges [12], [13]. Local orange color that has been ripe varies ranging from greenish to yellowish. The diameter and defects on the fruit are the only reference to determine the quality of local oranges. Color variations in local oranges can be an advantage for the commodity, so it is necessary to examine the process of orange selection based on size and color automatically. It is intended that the fruit can be arranged in a rack in accordance with the color gradation which is more representable when marketed to the costumer.

III. METHOD

A fruit sorting device has been developed at laboratory of Electrical Engineering, Universitas Muhammadiyah Yogyakarta. The device consists of a mechanical conveyor and a sensing device. This paper focuses on sensing technology applied to Malang oranges on a fruit sorting system. The result is data characteristic of fruit, which consist of diameter, area of object and red/green ratio based on its color. A photo box with certain lighting is used as a fruit detection area. The conveyor will pull the fruit into the photo box. A computer is used to process images from a camera inside photo box and extract data related to fruit characteristics.

A. Hardware and Software Setup

To produce an optimal image, we have designed a photo box to isolate the fruits from the environmental condition.

The box is fitted with lighting from the top using LED array lights. The box also has an entrance and an exit door so it can be placed on the conveyor. The fruit will be pulled by the conveyor into the photo box. Furthermore, the system will analyze the condition of the fruit without stopping the conveyor. The box is designed to have a size as shown in Figure 1. By using the box, the distance of the camera with the object is about 15 cm, varies depending on the size of the fruit. The background color is designed using white to make it easier for the program to distinguish between objects against the background. A camera is placed on the upper side of the box facing the fruit to be analyzed. The camera is connected to the computer using a USB interface as shown in Figure 2. On the computer, embedded program, written in Python language, record images with a resolution of 960 x 720 pixels. The research uses Python programming language because of its comprehensive support, huge community and simplicity of its codes. Python is an open source language so researchers do not need to buy a license.




Figure 1. Photo box design to accommodate the conveyor rails and produce shooting uniformity.




Figure 2. Block diagram of sensing device which is consist of an USB camera and a computer with OpenCV-Python installed.

Python also has support with other libraries, such as OpenCV. OpenCV is used as a library that will enclose image analysis program with camera hardware used. OpenCV (Open Source Computer Vision Library) is a software library that aims to process images in real-time or not real-time. In addition, pyQt is used to generate a GUI that can be operated in a windows environment. PyQt is an API that acts as a binding between Python and Qt cross-platform framework. For future projects, research development can be done by integrating artificial intelligent libraries such as Tensorflow for more accurate fruit classification system.

B. Object Detection

Object detection is the process of distinguishing objects to be observed against a background. Object detection is considered successful if the object can be separated from the background color so that the characteristics of the object can be observed more accurately. With the condition of the photo box which is white, then the oranges can be easily detected. The method used is with HSV thresholding. The method read the image color gradations in HSV format based on a predefined threshold value. HSV format has advantages in its sensitivity to distance changing, so it is suitable to be applied in object detection system. After the object can be estimated.

In the first step, the process of color image analysis will be done. The camera captures the image of the object along with the background of the conveyor used. Next, the user will manually mark the area of the object. The marked area will be converted to HSV image. By using HSV histogram, it can be determined the upper and lower limits of the image. The process is only done once to get the HSV threshold value. Furthermore, the process of detecting the object can be done repeatedly using the threshold value that have been obtained, as shown in Figure 3.

Object detection is process of separating objects which is in this case, oranges with its background. The purpose of this process is to produce an accurate recognition to the object, not affected by the background color. In the process of detecting the object, the image captured, then converted into HSV format. After that, HSV thresholding is used to convert the image into binary images using threshold values which is obtained from the previous process. Furthermore, noise removing is done on the binary image, using morphological transformation, which is erosion and dilation. The basic idea of erosion is like soil erosion. It erodes away the boundaries of foreground object. Meanwhile, dilatation is an opposite of erosion. It increases the size of foreground object. Generally, in noise removal, erosion is followed by dilation, because erosion removes white noises, but it also shrinks the object. The object appear as a white image surrounded by black pixels as the background. Finally, a contour detection function is applied. Contours can be explained as a curve joining all the boundary, having the same color and intensity. The contours are useful tool for object detection and recognition. Contours that have been formed can be used as a reference to know the area of the object and its location on the image, captured by the camera.

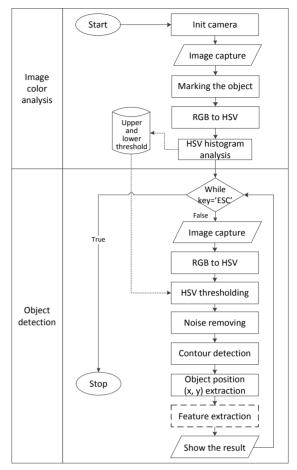


Figure 3. Flowchart of object detection using HSV thresholding and contour detection.

C. Feature Extraction

After the object is successfully detected, the feature extraction process can be done, shown in Figure 4. At first, convex hull is applied to the extracted contours. A polygon is considered a convex, if it is drawn a line connecting between points, then no line cuts the line that becomes the outer boundary of the polygon. From the convex polygon, then, min-max diameter and area of the polygon can be obtained. After that, the area outside the polygon will be removed, while the area inside the polygon is replaced with the original image, which is in RGB format. Furthermore, RGB histogram analysis can be done on the object without including background colors. The extractable feature is the amplitude of each color component that is red, green and blue based on its intensity range. Based on Figure 7, the most dominant color on the Malang orange fruit is red and green. The research uses red-green ratio to generate label on each fruit so that the fruit can be qualified based on its size and arranged based on its color. From Equation (1), r/g ratio can be calculated, using red and green color intensity.

$$r/g = \frac{\sum_{i=0}^{255} i \times r_i}{\sum_{i=0}^{255} i \times g_i} \tag{1}$$




Figure 4. Flowchart of extraction process to extract physical feature and red-green ratio.

IV. RESULT

Hull convex can be applied effectively on object selection process especially Malang oranges. Polygons can follow the border of the fruit with the background. Thus, the area outside the polygon can be removed so that the histogram analysis process can be done accurately, focus on the color of the object only. From the polygon that was successfully detected, it can extract the min-max diameter and the area inside the object.

Testing is done by using 7 spherical objects with different sizes. Each object is tested 5 times. Then the average data is calculated based on the measurement of the object diameter. The results are presented in graphical form in Figure 5. In the graph, the highest accuracy value is obtained using an object with a diameter of 52 mm x 52 mm. It because calibration is only done using objects with those sizes. The smallest accuracy value obtained is 88%. Accuracy is still good with an average value in the range of 90%. The measurement accuracy can be improved by calibrating of all samples. By using regression analysis, the measurement error due to non-linearity problems resulting from the camera, can be minimized.




Figure 5. Accuracy of fruit measurement process using 7 spherical objects with different sizes.

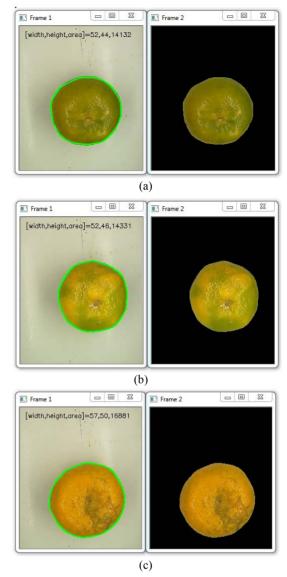




Figure 6. The result of the object selection generates min-max diameter and the area inside the hull polygon of an orange with (a) low ripeness, (b) medium ripeness and (c) high ripeness.

Malang oranges has very large color variations, as shown in Figure 6. Fruit gradation cannot be used as a reference to recognize the fruit maturity level. According to existing standards, the size and defects in the fruit become parameters to determine the quality of the fruit. Based on the fruit diameter, the classification can be done. The harvest will be categorized as class A for fruit with a diameter more than 4 cm and smooth. While the 3-4 cm diameter fruit goes to class B and less than 3 cm for class C. Whereas, from the histogram data, it can be used as a reference for fruits labeling, so that, the fruit can be arranged according to the color gradation. This is done by calculating the red-green ratio from histogram data. From Figure 7, the red-green ratio of the three oranges, generated different values. Visually, the low red-green fruit ratio has a greener color, while the high red-green ratio has a more yellow color.








Figure 7. Histogram analysis of an orange with (a) low, (b) medium and (c) high red-green ratio.

V. SUMMARY

Feature extraction is a process that utilizes image processing to detect the specific characteristics contained in an object inside an image. A lot of variable which can affect the image quality such as light and distance. Therefore, all measurements are made with a camera that has the same distances and fixed illumination. To get a fixed lighting, then the measurement is done utilizing LED lighting with color temperature of 6500 Kelvin. The measurement result using convex hull method has a high accuracy of more than 88%. From the experiment, the highest measurement accuracy was obtained on the object with a diameter of 52 mm because the calibration was performed at that point. The area of the object can be detected effectively because polygons can

follow the shapes of the edge of the fruit well. Malang oranges classification system can be done only based on its diameter because the color does not affect the maturity and fruit grade. In addition, it was found that the color of Malang orange affects the dominant red and green components of the RGB histogram. Red-green ratio can be used as a reference to label the fruit, so it can be used to arrange the fruit based on the color gradation.

ACKNOWLEDGMENT

Support was given by Universitas Muhammadiyah Yogyakarta, who funded the work in all its stages. We would like to thank Microcontroller and Robotic Lab at Department of Electrical Engineering for their support, without whose help this work would never have been possible.

REFERENCES

- [1] Badan Standarisasi Nasional, 'Jeruk Keprok', SNI 3165:2009, 2009.
- [2] Top Production of Oranges 2014-choose 'Production Crops World' in the left margin and picklist.
- [3] F. López-García, G. Andreu-García, J. Blasco, N. Aleixos, J. M. Valiente, "Automatic detection of skin defects in citrus fruits using a multivariate image analysis approach", Comput. Electron. Agric., vol. 71, no. 2, pp. 189-197, 2010.
- [4] U. Ahmad, S. Mardison, R Tjahjohutomo, A. Nurhasanah, "Development of automatic grading machine prototype for citrus using image processing", Australian Journal of Agriculture Engineeringl, no. 5, pp. 165-169, 2010.
- [5] U. Ahmad, "The use of color distribution analysis for ripeness prediction of Golden Apollo melon", J. Appl. Hortic., vol. 19, Nov. 2017
- [6] Sirisathitkul Yaowarat, Naphasorn Thumpen, Weerayut Puangtong, "Automated Chokun orange maturity soriting by colour grading", alailak Journal of Science and Technology (WJST), vol. 3, no. 2, pp. 195-205, 2011.
- [7] C. Damarjati, S. Riyadi, W. I. Triyani, L. M. Azizah and T. K. Hariadi, "Statistical features extraction of discrete curvelet transform for surface quality evaluation of mangosteen," 2017 7th IEEE International Conference on Control System, Computing and Engineering (ICCSCE), Penang, 2017, pp. 236-241.
- [8] L. M. Azizah, S. F. Umayah, S. Riyadi, C. Damarjati and N. A. Utama, "Deep learning implementation using convolutional neural network in mangosteen surface defect detection," 2017 7th IEEE International Conference on Control System, Computing and Engineering (ICCSCE), Penang, 2017, pp. 242-246.
- [9] C. P. Diana Carolina and N. T. Deivis David, "Classification of oranges by maturity, using image processing techniques," 2014 III International Congress of Engineering Mechatronics and Automation (CIIMA), Cartagena, 2014, pp. 1-5.
- [10] A. Wajid, N. K. Singh, P. Junjun and M. A. Mughal, "Recognition of ripe, unripe and scaled condition of orange citrus based on decision tree classification," 2018 International Conference on Computing, Mathematics and Engineering Technologies (iCoMET), Sukkur, 2018.
- [11] S. Sabzi, Y. Abbaspour-Gilandeh and J. I. Arribas, "Non-intrusive image processing Thompson orange grading methods," 2017 56th FITCE Congress, Madrid, 2017, pp. 35-39.
- [12] B. Kanimozhi, R. Malliga, Classification of Ripe or Unripe Orange Fruits Using the Color Coding Technique, vol. 1, no. 3, pp. 43-47, 2017.
- [13] E Kane Kevin, Suk Lee Won, "Multispectral Imaging for In-field Green Citrus Identification", American Society of Agricultural and Biological Engineers, no. 073025, 2007.