

Flow Pattern Map of Steam- Condensate Flow in a Horizontal Double Pipe

by Sukamta Sukamta

Submission date: 14-Jan-2020 03:41PM (UTC+0700)

Submission ID: 1241782887

File name: Bidang_C.19-Sukamta.pdf (3.11M)

Word count: 2126

Character count: 10969

19

Flow Pattern Map of Steam-Condensate Flow in a Horizontal Double Pipe

Sukamta^a, Indarto^b, Purnomo^b, Tri Agung Rohmat^b

^aDepartment of Mechanical Engineering, Faculty of Engineering,
 Universitas Muhammadiyah Yogyakarta, Jl. Ringroad Selatan, Tamontirto, Kasihan, Bantul,
 Yogyakarta, Indonesia,
 phone +628157998996, email : msukamta@gmail.com, sukamta@umy.ac.id

^bDepartment of Mechanical and Industrial Engineering,
 Faculty of Engineering, Gadjah Mada University,
 Jl. Grafika no. 2 Yogyakarta, Indonesia

ABSTRACT

There has been some success story in the formulating models for different flow regimes, and a number of corresponding flow maps for horizontal has been developed. Furthermore, most of the maps were generated based on visual observations and are, therefore, subjective in nature. Meanwhile, slugging phenomenon that can be defined as initiation of a water hammer is a very interesting topic because it has a strategic impact on safety factor of the equipment in piping systems i.e. pressurized water reactor (PWR), heat exchanger, steam or gas transportation in chemical industry, air conditioning, etc. The objective of the present research was to investigate the slugging as an initiating water hammer phenomena through non directly contact steam condensing in a horizontal pipe to develop the flow pattern map of steam-condensate flow in a horizontal double pipe. The experimental apparatus used in the present experimental study consisted of an inner annulus pipe made of copper ($d_i = 17.2$ mm, $d_o = 19$ mm) with a length of 1.8 m. The outer pipe annulus was a galvanized iron pipe ($d_i = 108.3$ mm, $d_o = 114.3$ mm) with a length of 1.6 m. The liquid being tested was water. The experiments were conducted at a static pressure of $P_s = 108.825$ kPa and the temperature of $T = 119.7$ °C. The pressure drop in axial direction of the test was directly measured by using a differential pressure transducer (validyne, accuracy of $\pm 0.25\%$) with a sampling rate of 7.353 kHz. The obtained experimental data of temperature and differential pressure fluctuations during the steam condensation in a horizontal pipe was analyzed using a statistical analysis. It was found that: 1) the flow pattern map of non slugging (stratified and wavy flow), transition (wavy-slug flow), and slugging (slug and large-slug), were determined, here the transition flow pattern of slug and large-slug is defined as an initiating of water hammer, 2) transition area range of wavy-slug flow pattern are from $\dot{m}_{wv} = 1 \times 10^{-3}$ kg/s to $\dot{m}_{wv} = 6 \times 10^{-3}$ kg/s for $\dot{m}_a = 6 \times 10^{-3}$ kg/s to $\dot{m}_a = 7.5 \times 10^{-3}$ kg/s, and $\dot{m}_{wv} < 3 \times 10^{-3}$ kg/s for $\dot{m}_a = 8 \times 10^{-3}$ kg/s to $\dot{m}_a = 9 \times 10^{-3}$ kg/s. These obtained data are very important in order to develop a database for input in a safe early warning system design of two-phase flow piping installation system during the steam condensation.

Keywords

Flow pattern map, slugging, steam-condensate, horizontal double pipe, water hammer

1. INTRODUCTION

Research in relation to the condensation heat transfer coefficient on a vertical pipe. The test section consisted of a vertical, double-pipe cylinder made of stainless steel SUS304 has been conducted by Nagae T., Murakami M., Wu T., Vierow K. [1]. The inner tube was the heat transfer tube with inside diameter of 19.3 mm, wall thickness of 3.04 mm and height of 1.8 m. The mixture of steam and water flowed into the tube from the bottom inlet. The coolant water flows along the outer surface of the heat transfer tube. The temperature distribution in the axial direction under pressure of 0.1 MPa, at an inlet steam flow rate of 1.23 g/s is found. Since the steam condenses and its partial pressure drops as it flows downstream, steam-air mixture temperature decreases accordingly. While the enthalpy of the steam is higher near the inlet, and thus the temperature decrease rate is low, the enthalpy decreases with the temperature decrease and the temperature decrease rate tends to grow higher.

More than five decades there have been studies efforts toward better understanding the mechanism of two-phase flow. Meanwhile because of the complex nature of two-phase flow, a complete understanding has not yet been achieved. Many investigations have postulated that the mechanisms are different for each flow regimes or pattern. Accordingly, there has been some success story in the formulating models for different flow regimes, and a number of corresponding flow maps for horizontal has been developed. A well known flow pattern map was proposed by Mandane et al. [2]. Furthermore, many of the maps are the product of visual observations and are, therefore, subjective in nature. By far the most commonly used methods to discriminate flow regimes, particularly in early years, were application of visual and high speed cameras. More modern methods use analysis of the time series on experimental data from X-ray, conductance probes, pressure transducers in attempt to classify the pattern objectively. Matsui [3,4] used differential pressure transducers, Tutu [5] used absolute pressure transducers, Brauner D., O. Shaham, and Y. Taitel [6] used conductance probes, Jones and Zuber [7] used an X-ray void measurement system for the vertical upflow in a tube. Elkow and Rezkallah [8] used a capacitance sensor to measure void fluctuation. In most

cases the analysis of the power spectrum density (PSD) function are usually employed to extract the periodic feature of a signal. Matsui [4] calculated the PSD and probability density function (PDF) of the transient pressure drop signal to identify flow pattern of two-phase flow in a vertical pipe. Franca F., Acikgoz M., Lahey R.T. Jr., Clause A. [9] and Cai, Y., Wambsgans M.W., Jendrzeczyk J.A. [10] employed PSD and other fractal techniques for flow pattern identification as well. Wang [11, 12] used Nonlinear analysis to analyze differential pressure fluctuations of two phase flow through a T-junction with the aim to make clear the two-phase flow behavior splitting at a T-junction. These results may be significant for better understanding the flow structure and also for establishing valid models different from conventional viewpoints.

Based on the above description, an investigation of steam condensation and two phase flow is very wide-ranging. Many things can still be explored to explain the phenomena of two phase flow, especially related to condensation, both in the geometry, orientation or position of the pipe, and condensation process. From those facts, the objectives of this research are to study the two-phase flow pattern map of steam-condensate flow in a horizontal double pipe.

2. METHODOLOGY

The experiment apparatus used in present experimental study is shown in Fig. 1 and the detail of the test pipe is in Fig. 2.

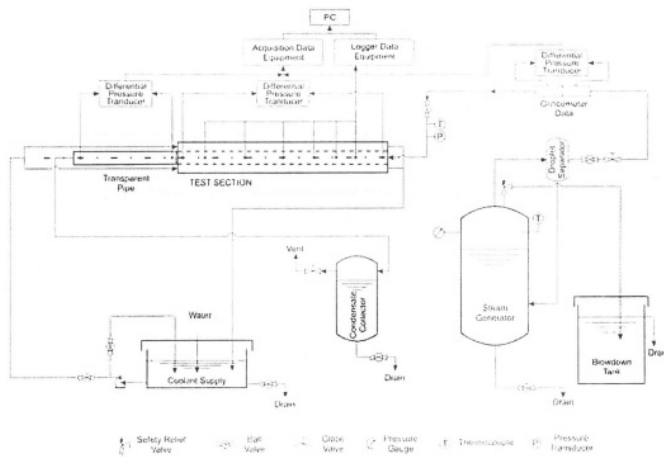


Figure 1: Experiment apparatus used in the present study

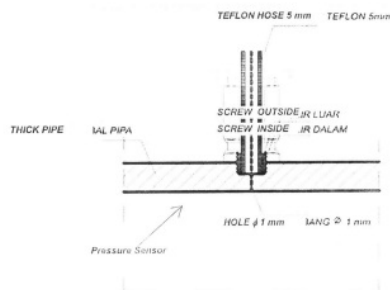


Figure 2: The detail installation of the differential pressure sensor

The Tested liquid was water. The experiment apparatus consisted of the inner annulus pipe made from copper ($d_{in} = 17.2$ mm, $d_o = 19$ mm) with a length of 1.8 m. The outer pipe annulus is a galvanized iron pipe ($d_{in} = 108.3$ mm, $d_o = 114.3$ mm) with a length of 1.6 m. In the present experimental study, the water was heated using a boiler to generate steam which was then flowed and condensed inside the annulus pipe to form a steam-condensate two-phase flow in horizontal pipe. The experiments were conducted at a static pressure of $P_s = 108.825$ kPa dan the temperature of $T = 119.7$ °C. The water was used as a coolant in the outer of annulus pipe. The pressure drop in the axial direction of the test was directly measured by using a differential pressure transducer with a sampling rate of 7.353 kHz.

3. RESULTS AND DISCUSSION

Flow pattern transition region map between non-slugging and slugging can be seen in Fig. 3. This map are derived from statistical analysis of pressure difference fluctuation data with the frequency domain (power spectra density) and time domain (root mean square, standard deviation, Skewness, Kurtosis and normal distribution). Based on the results of statistical analysis it can be concluded that at different cooling water mass flow rate ranging from $\dot{m}_{co} = 1.24 \times 10^{-1}$ kg/s to $\dot{m}_{co} = 5.78 \times 10^{-1}$ kg/s for steam mass flow rate less than $\dot{m}_{st} = 6 \times 10^{-3}$ kg/s, the flow pattern is stratified or wavy flow that categorized as non-slugging. In the same range of cooling water mass flow rate, for steam mass flow rate $\dot{m}_{st} = 6 \times 10^{-3}$ kg/s to $\dot{m}_{st} = 7.5 \times 10^{-3}$ kg/s, the flow pattern is Wavy-slug that then classified as transitional. Furthermore, for the small cooling water mass flow rate (less than $\dot{m}_{co} = 3 \times 10^{-1}$ kg/s) and for high steam mass flow rate ($\dot{m}_{st} = 8 \times 10^{-3}$ kg/s to $\dot{m}_{st} = 9 \times 10^{-3}$ kg/s) re-establish the wavy-slug flow pattern (transitional) and stratified (non-slugging). However, for the large cooling water mass flow rate ($\dot{m}_{co} = 4 \times 10^{-1}$ kg/s to $\dot{m}_{co} = 6 \times 10^{-1}$ kg/s) and the steam mass flow rate ($\dot{m}_{st} = 8 \times 10^{-3}$ kg/s to $\dot{m}_{st} = 9 \times 10^{-3}$ kg/s), the flow patterns occurred slug or large-slug.

Next, for the small cooling water mass flow rate (less than $\dot{m}_{co} = 2 \times 10^{-1}$ kg/s) and steam mass flow rates between $\dot{m}_{st} = 7 \times 10^{-3}$ kg/s to $\dot{m}_{st} = 8 \times 10^{-3}$ kg/s is also slug flow pattern occurred. Based on the above description, it can be concluded that the flow pattern that occurs is the start from stratified and Wavy (non-slugging), Wavy-slug (transitions) and slug or large slug (slugging). These data are very important to complete the database that can be used as an input in early warning system design for plant safety piping system. Next, visualization of flow pattern in a horizontal transparent pipe ($d_i = 17$ mm, *plexiglass*) is shown in Fig. 4. Position of the transparent pipe is after the condenser pipe.


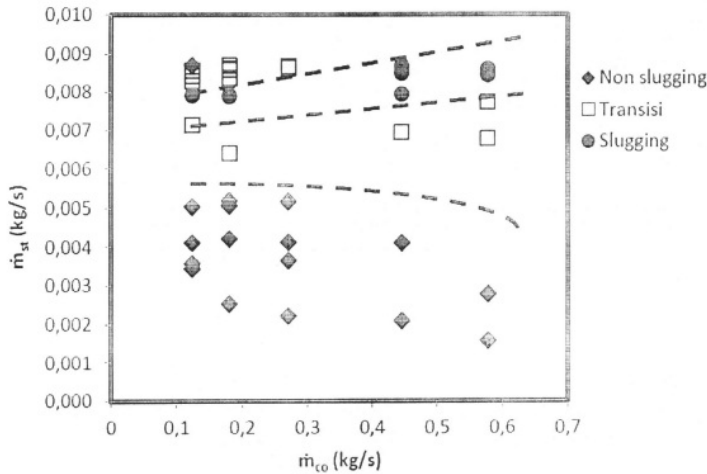


Figure 3: Flow pattern map of slugging and non slugging

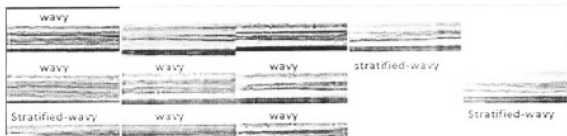

NOMENCLATURE

d = diameter (m)
 A=area (m²)
 Q_w =Heat transfer rate (kW)
 \dot{m} =steam mass flow rate (kg/s)
 sat=saturated
 T = temperature (°C)
 h = local heat transfer coefficient
 (W/m².K)
 k = conduction thermal coefficient
 (W/m.K)
 r = radius (m)
 \dot{m} = mass flow rate (kg/m³)
 L = length (m)
 s = second
 Hz = hertz

Subscript

i = inner
 o =outer
 w = wall
 cl = centerline
 co = coolant water
 wo= wall-outer
 wi=wall-inner
 bott=bottom
 st=steam
 av=average

ACKNOWLEDGEMENTS

The authors gratefully acknowledge financial support of this research by Ministry of National Education of Indonesia and Muhammadiyah University of Yogyakarta to conduct this work.

REFERENCES

- [1] Nagae T , Murase M, Wu T , Vierow K., *Evaluation Of Reflux Condensation Heat Transfer Of Steam-Air Mixtures Under Gas-Liquid Countercurrent Flow In A Vertical Tube*, Journal Of Nuclear Science and Technology, Vol. 42, No.1, 2005, pp. 50-57
- [2] Mandhane, J. M, Gregory G. A., and Aziz K., 1974, *A flow pattern map for gas-liquid flow in horizontal pipes*, in: *Int. J. Multiphase Flow*, 1, 537
- [3] Matsui G., (1984), *Identification of flow regimes in vertical gas liquid two-phase flow using differential pressure fluctuations*, *Int. J. Multiphase Flow* 10, 711–720.
- [4] Matsui G., (1986), *Automatic identification of flow regimes in vertical two-phase flow using differential pressure fluctuations*, *Nucl. Eng. Des.* 95, 221–231.
- [5] Tutu N.K., 1984. *Pressure Drop Fluctuations and Bubble-Slug Transition in a Vertical Two-Phase Water Flow*. *Int. J. Multiphase Flow* 10, 211-216
- [6] Brauner D., O. Shaham, and Y. Taitel, (1980), *Int. J. Multiphase Flow*, 6, 387.
- [7] Jones O.C. and Zuber N., (1975), *The interrelation between void fraction fluctuations and flow patterns in two-phase flow*. *Int. J. Multiphase Flow* 2, pp. 273–306
- [8] Elkow K. J. And Rezkallah K. S., (1997), *Statistical Analysis Of Void Fluctuations In Gas-Liquid Flows Under 1-g And μ -G Conditions Using A Capacitance Sensor*, *Int. J. Multiphase Flow* Vol. 23, No. 5, pp. 831-844
- [9] Franca F., Acikgoz M., Lahey R.T. Jr., Clausse A., (1991), *The use of fractal techniques for flow regime identification*, *Int. J. Multiphase Flow* 17, 545–552
- [10] Cai, Y., Wambsganss M.W., Jendrzeczyk J.A., (1996), *Application of chaos theory in identification of two-phase flow patterns and transitions in a small, horizontal, rectangular channel*, *ASME J. Fluid Eng.* 118, 383–390.
- [11] Wang, W.C., Ma, X.H., Wei, Z.D., dan Yu, P., 1998. *Two Phase Flow Patterns and Transition Characteristic for in-tube Condensation with different Surface inclination*, *Int. J. Heat Mass Transfer*, 41, 4341-4349.
- [12] Wang S.F., Mosdorf R., Shoji M., (2003), *Nonlinear analysis on fluctuation feature of two-phase flow through a T-junction*, *International Journal of Heat and Mass Transfer* 46, 1519–1528

Flow Pattern Map of Steam-Condensate Flow in a Horizontal Double Pipe

ORIGINALITY REPORT

10%

SIMILARITY INDEX

%

INTERNET SOURCES

10%

PUBLICATIONS

%

STUDENT PAPERS

PRIMARY SOURCES

- 1** NAGAE, Takashi, Michio MURASE, Tiejun WU, and Karen VIEROW. "Evaluation of Reflux Condensation Heat Transfer of Steam-Air Mixtures under Gas-Liquid Countercurrent Flow in a Vertical Tube", *Journal of Nuclear Science and Technology*, 2005. **5%**

Publication
- 2** Wang, S.. "Nonlinear analysis on fluctuation feature of two-phase flow through a T-junction", *International Journal of Heat and Mass Transfer*, 200304 **3%**

Publication
- 3** R. Kozma. "Studies on the relationship between the statistics of void fraction fluctuations and the parameters of two-phase flows", *International Journal of Multiphase Flow*, 1995 **1%**

Publication
- 4** G.H. Abdul-Majeed. "Liquid holdup in horizontal two-phase gas—liquid flow", *Journal of Petroleum Science and Engineering*, 1996 **1%**

Publication

Exclude quotes On

Exclude bibliography Off

Exclude matches < 1%