


TEST NAME	MAX POWER	MAX TORQUE	Temp. °C	Humidity %	Pressure	KMH	Date/Time
MEGA PRO 160 T069	13.1 (13.1) / 7782	13.13 (13.13) / 6193	34.9 °C	49 %	1000.0 mbar	95.1	6/2/2016 2:00:36 PM

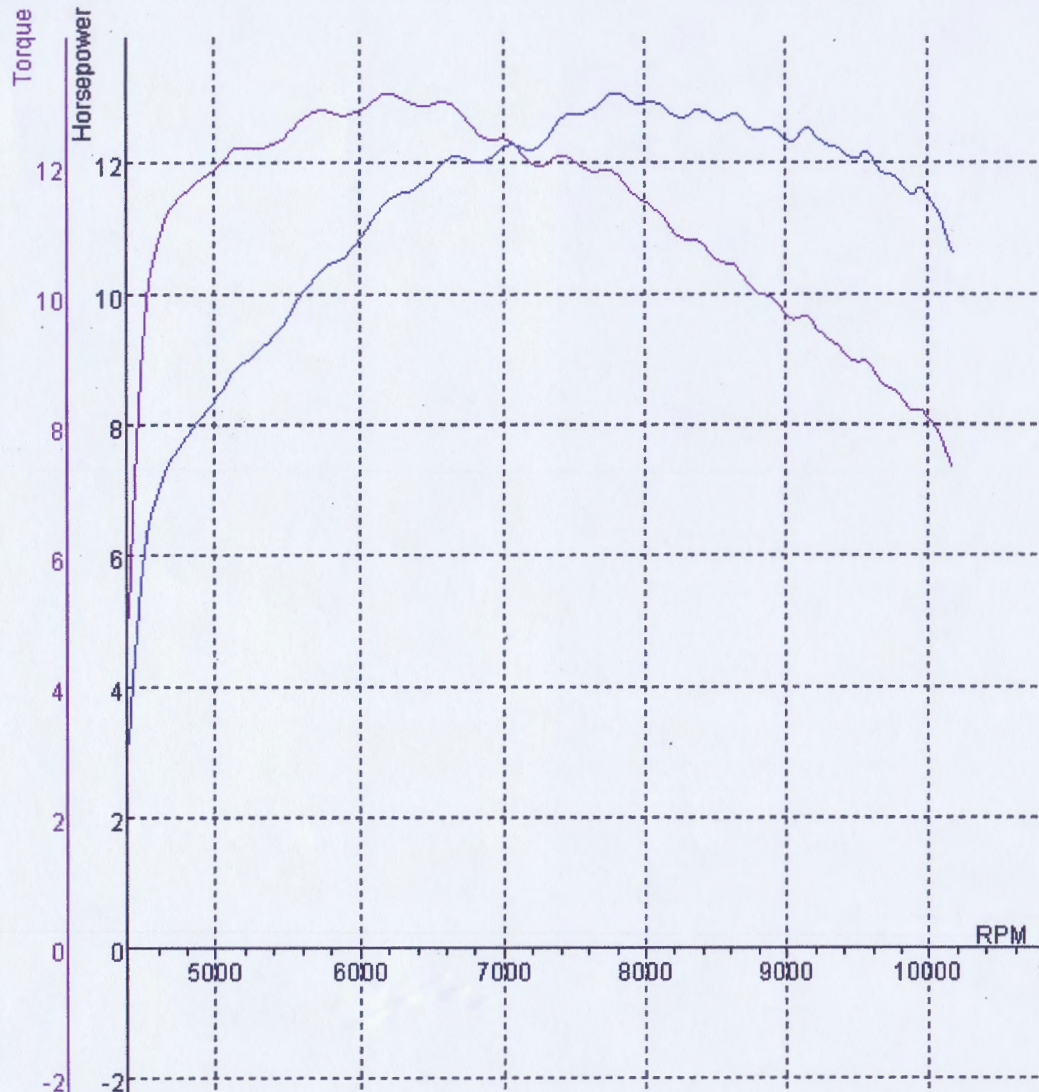

DATA FOR TEST: MEGA PRO 160 T069

Comments

KOIL RACING / CDI STD / PERTAMAX 92

RPM	HP (HP)	TQ (N*M*M)	T
4500	6.1	9.63	0.58
4750	7.7	11.58	0.74
5000	8.4	12.02	0.88
5250	9.0	12.28	1.02
5500	9.7	12.52	1.16
5750	10.4	12.88	1.30
6000	10.9	12.88	1.44
6193	11.4	13.13	1.54
6250	11.5	13.08	1.58
6500	11.9	12.96	1.72
6750	12.0	12.69	1.86
7000	12.3	12.42	2.02
7250	12.3	12.01	2.16
7500	12.7	12.03	2.32
7750	13.0	11.95	2.46
7782	13.1	11.92	2.48
8000	12.9	11.45	2.62
8250	12.7	10.88	2.80
8500	12.7	10.56	2.96
8750	12.5	10.14	3.14
9000	12.3	9.68	3.34
9250	12.3	9.42	3.52
9500	12.1	9.00	3.72
9750	11.8	8.53	3.96
10000	11.4	8.06	4.18

LOSSES: 0.0 HP


0.0N\*M\*M

TOTAL ENGINE: 13.1HP

13.13N\*M\*M



TEST NAME	MAX POWER.	MAX TORQUE	Temp. °C	Humidity %	Pressure	KMH	Date/Time
MEGA PRO 160 T081	13.1 (13.1) / 7723	12.97 (12.97) / 6461	35.1 °C	51 %	1000.0 mbar	93.6	6/2/2016 2:06:58 PM

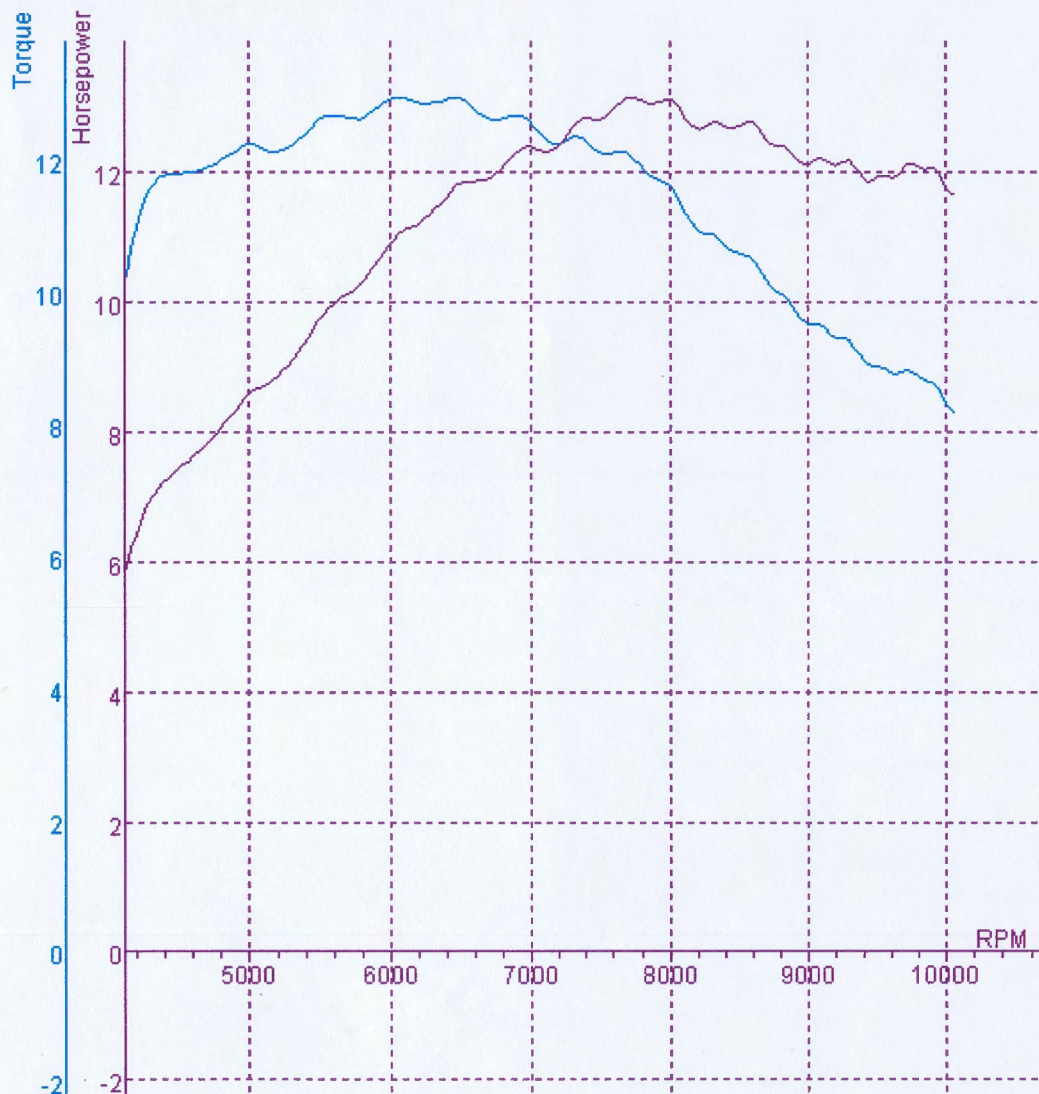

DATA FOR TEST: MEGA PRO 160 T081


Comments  
KOIL STD / CDI BRT / PERTAMAX 92

RPM	HP (HP)	TQ (N*M*M)	T
4000	6.2	10.68	0.52
4250	6.8	11.40	0.58
4500	7.5	11.81	0.74
4750	8.0	11.96	0.88
5000	8.6	12.25	1.04
5250	9.0	12.21	1.18
5500	9.8	12.68	1.32
5750	10.2	12.64	1.46
6000	10.9	12.93	1.58
6250	11.4	12.87	1.74
6461	11.8	12.97	1.84
6500	11.8	12.91	1.88
6750	12.0	12.63	2.02
7000	12.4	12.54	2.16
7250	12.6	12.32	2.30
7500	12.8	12.11	2.46
7723	13.1	12.09	2.58
7750	13.1	12.03	2.60
8000	13.1	11.62	2.76
8250	12.7	10.89	2.94
8500	12.7	10.58	3.10
8750	12.4	10.05	3.28
9000	12.1	9.53	3.48
9250	12.1	9.30	3.66
9500	11.9	8.89	3.88
9750	12.1	8.79	4.08
10000	11.7	8.28	4.30

LOSSES: 0.0 HP 0.0N\*M\*M  
TOTAL ENGINE: 13.1HP 12.97N\*M\*M



TEST NAME	MAX POWER.	MAX TORQUE	Temp. °C	Humidity %	Pressure	KMH	Date/Time
MEGA PRO 160 T072	13.3 (13.3) / 7913	13.28 (13.28) / 6294	35.1 °C	49 %	1000.0 mbar	94.0	6/2/2016 2:03:53 PM

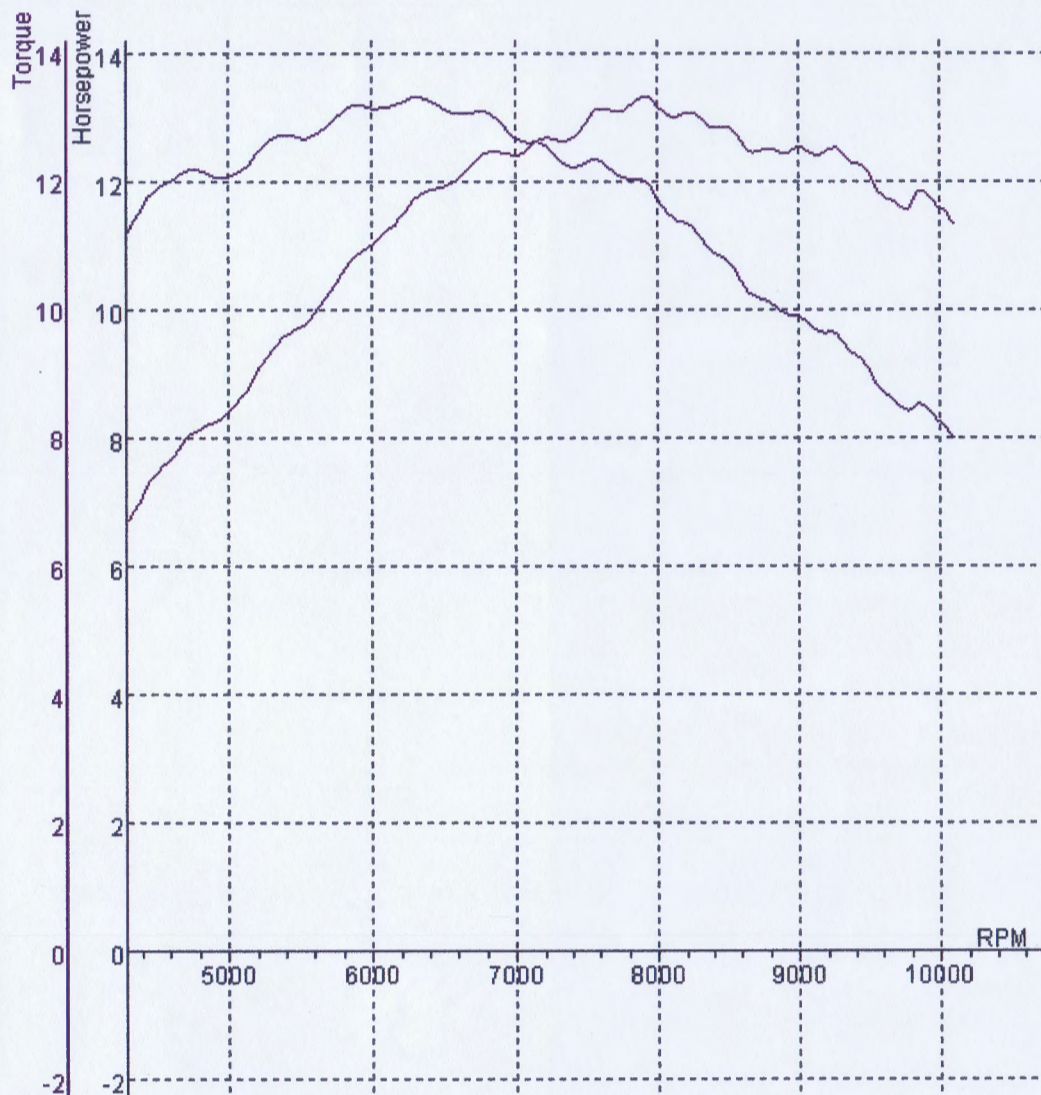

DATA FOR TEST: MEGA PRO 160 T072


Comments  
KOIL STD / CDI STD / PERTAMAX 92

RPM	HP (HP)	HP (N*M*M)	T
4000	6.9	11.36	0.52
4250	7.0	11.49	0.54
4500	7.5	11.86	0.62
4750	8.1	12.14	0.78
5000	8.5	12.05	0.92
5250	9.3	12.57	1.06
5500	9.8	12.63	1.20
5750	10.4	12.95	1.32
6000	11.0	13.10	1.46
6250	11.6	13.25	1.60
6294	11.7	13.28	1.62
6500	11.9	13.06	1.74
6750	12.4	13.05	1.88
7000	12.4	12.62	2.02
7250	12.7	12.36	2.18
7500	13.0	12.29	2.32
7750	13.1	12.01	2.46
7913	13.3	11.96	2.56
8000	13.2	11.68	2.62
8250	13.0	11.16	2.80
8500	12.8	10.70	2.96
8750	12.5	10.12	3.14
9000	12.5	9.87	3.32
9250	12.5	9.58	3.52
9500	12.1	8.98	3.72
9750	11.6	8.39	3.94
10000	11.6	8.18	4.16

LOSSES: 0.0 HP 0.0N\*M\*M  
TOTAL ENGINE: 13.3HP 13.28N\*M\*M



TEST NAME	MAX POWER.	MAX TORQUE	Temp. °C	Humidity %	Pressure	KMH	Date/Time
MEGA PRO 160 T088	13.2 (13.2) / 8101	13.01 (13.01) / 6173	35.2 °C	46 %	1000.0 mbar	94.1	6/2/2016 2:11:15 PM

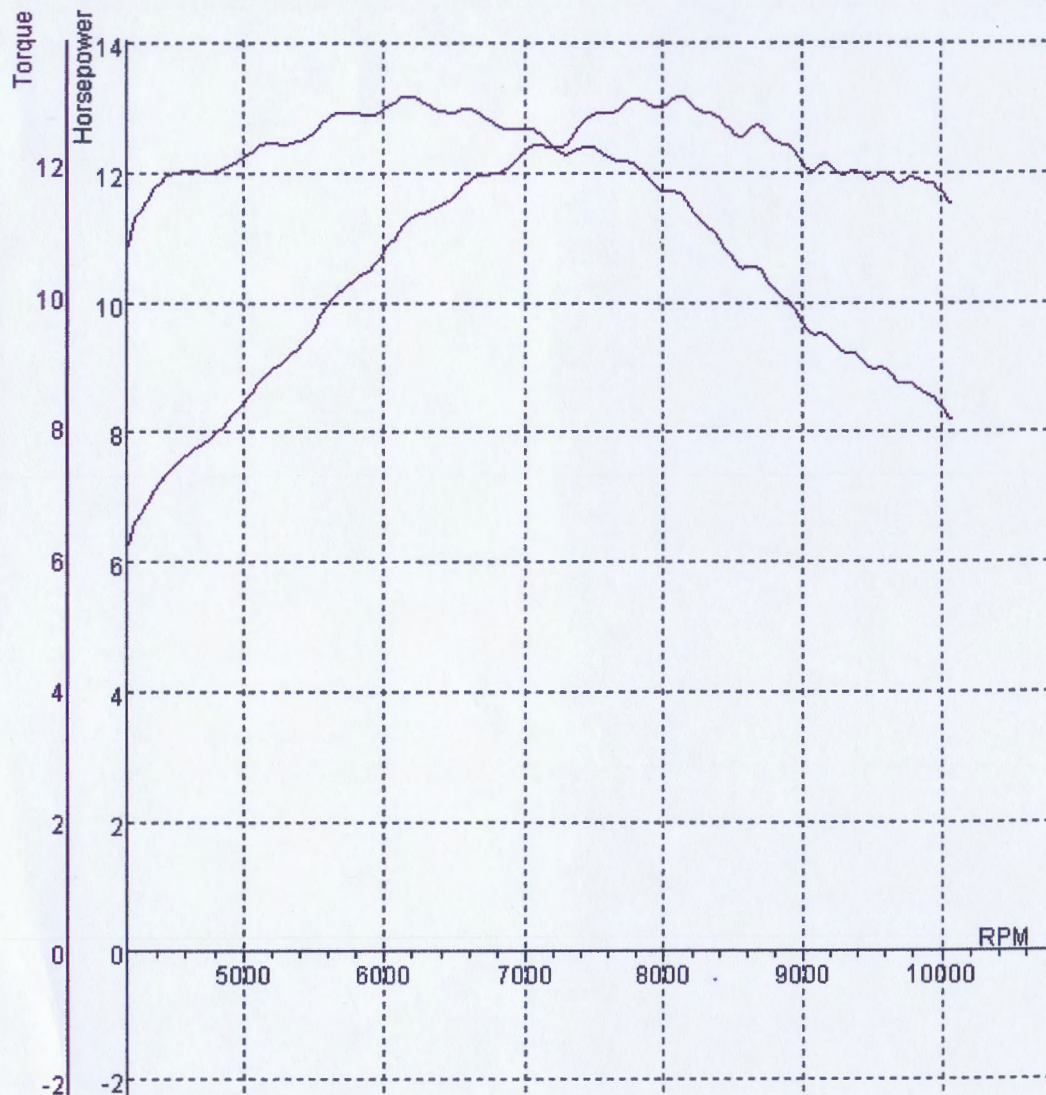

DATA FOR TEST: MEGA PRO 160 T088

Comments

KOIL RACING / CDI BRT / PERTAMAX 92

RPM	HP (HP)	TQ (N*M*M)	T
4000	6.5	10.99	0.52
4250	6.8	11.30	0.56
4500	7.5	11.84	0.70
4750	7.9	11.85	0.84
5000	8.5	12.13	1.00
5250	9.1	12.28	1.14
5500	9.7	12.52	1.28
5750	10.3	12.77	1.42
6000	10.9	12.86	1.56
6173	11.3	13.01	1.64
6250	11.4	12.92	1.70
6500	11.7	12.77	1.82
6750	12.0	12.59	1.98
7000	12.4	12.53	2.12
7250	12.4	12.15	2.26
7500	12.9	12.20	2.42
7750	13.1	12.01	2.56
8000	13.0	11.56	2.72
8101	13.2	11.55	2.78
8250	13.0	11.14	2.88
8500	12.6	10.49	3.06
8750	12.6	10.17	3.24
9000	12.2	9.57	3.42
9250	12.0	9.18	3.62
9500	11.9	8.87	3.82
9750	11.9	8.64	4.04
10000	11.7	8.25	4.26

LOSSES: 0.0 HP 0.0N\*M\*M  
 TOTAL ENGINE: 13.2HP 13.01N\*M\*M