

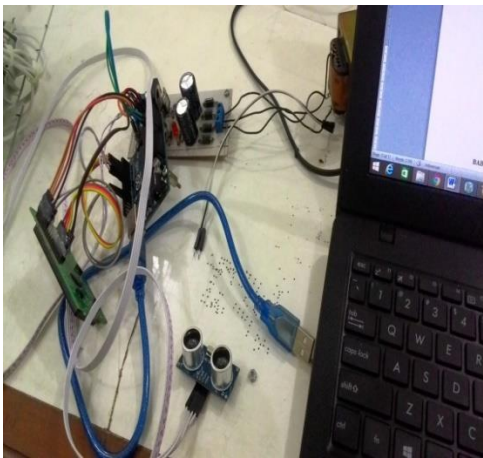


## A. Gambar Perakitan Modul

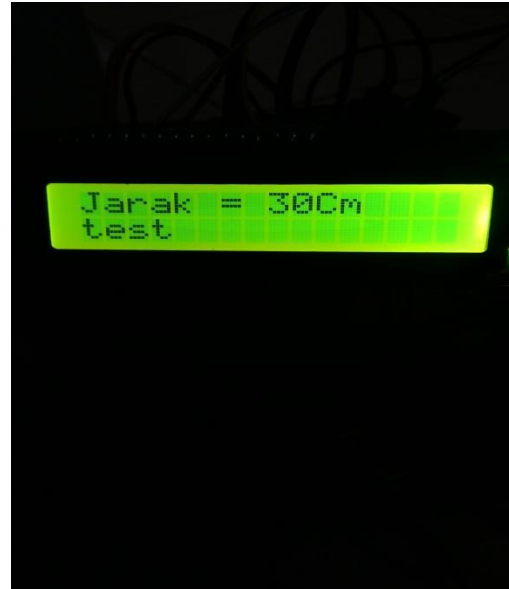



## B. Gambar Modul

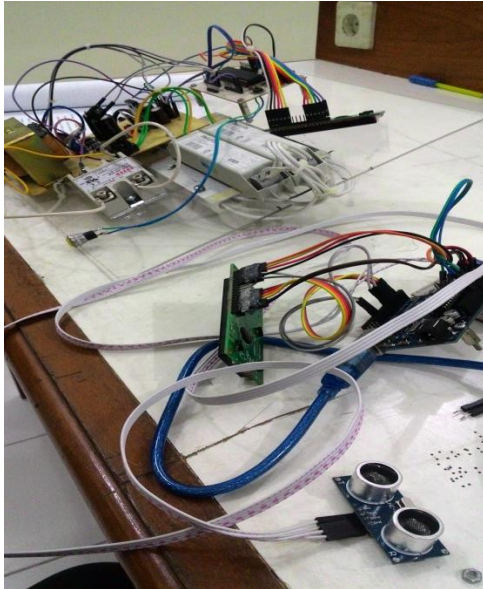

### C. Gambar Pengambilan sample



## MAVIN NA 2 LOADCELL

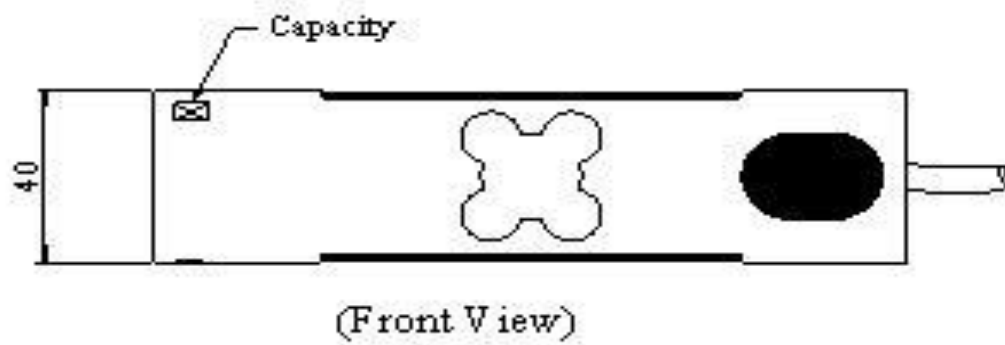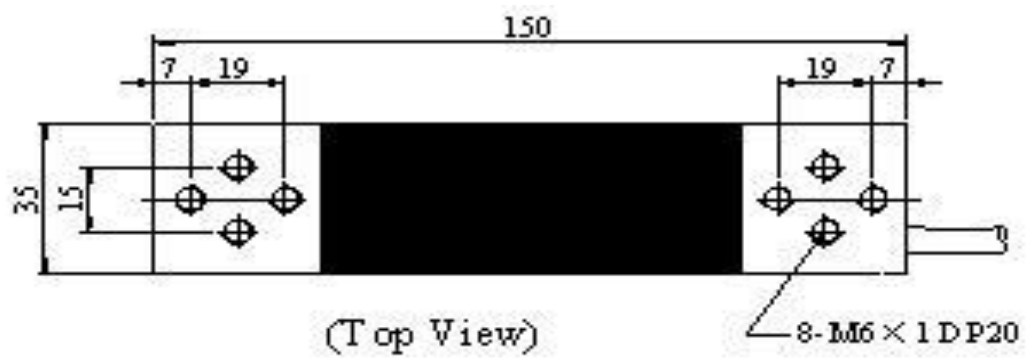

<b>Kapasite</b>	<b>60 - 100 - 150 - 200 - 250 - 300 - 350 - 500 (kg)</b>
<b>Çıkış Voltajı</b>	<b>2.0 mV/V±5%</b>
<b>Tekrarlanabilirlik</b>	<b>0.02% R.O.</b>
<b>Creep(30min)/DR</b>	<b>0.02% R.O.</b>
<b>Sıfır Seviyesi</b>	<b>±0.0200 mV/V</b>
<b>Giriş Direnci</b>	<b>390±15 Ω ; 410±15 Ω</b>
<b>Çıkış Direnci</b>	<b>350±5 Ω</b>
<b>Yalıtkanlık</b>	<b>≥5000MΩ/(50VDC)</b>
<b>Güvenlik seviyesi</b>	<b>150% R.O.</b>
<b>Çalışma Sıcaklık Aralığı</b>	<b>-20~60 °C</b>
<b>Yapısı</b>	<b>Alüminyum</b>
<b>Koruma Sınıfı</b>	<b>IP66 / IP67</b>
<b>Kablo</b>	<b>φ5×1.5 m</b>
<b>Bağlantı</b>	<b>Red (EXC+) ,Black (EXC-) ,Green (SIG+) ,White (SIG-)</b>

Rated Capacities	60, 100, 150, 200, 250, 300, 350, 500 (kg)
Rated Output	2.0 mV/V±5%
Non-linearity	0.02% R.O.
Hysteresis	0.02% R.O.
Repeatability	0.02% R.O.
Creep(30min)	0.02% R.O.

Temperature Effect On Output	0.002%R.O./°C
Temperature Effect On Zero	0.003%R.O./°C
Zero Balance	±0.0200 mV/V
Input Impedance	390±15 Ω ; 410±15 Ω
Output Impedance	350±5 Ω
Insulation Impedance	≥5000MΩ/(50VDC)
Safe Overload	150% R.O.
Ultimate Overload	200% R.O.
Operating Temperature Range	-20~60 °C
Recommended Excitation	5~12 VDC
Maximum Excitation	15 VDC
Construction	Aluminum Alloy ; Steel Alloy
Protection Class	IP66 / IP67
Cable	φ5×1.5 m
Platform Size	350×450 mm
Mode of Connection	Red (EXC+) ,Black (EXC-) ,Green (SIG+) ,White (SIG-)